


Overview


HP ProBook 430 G3 Notebook PC

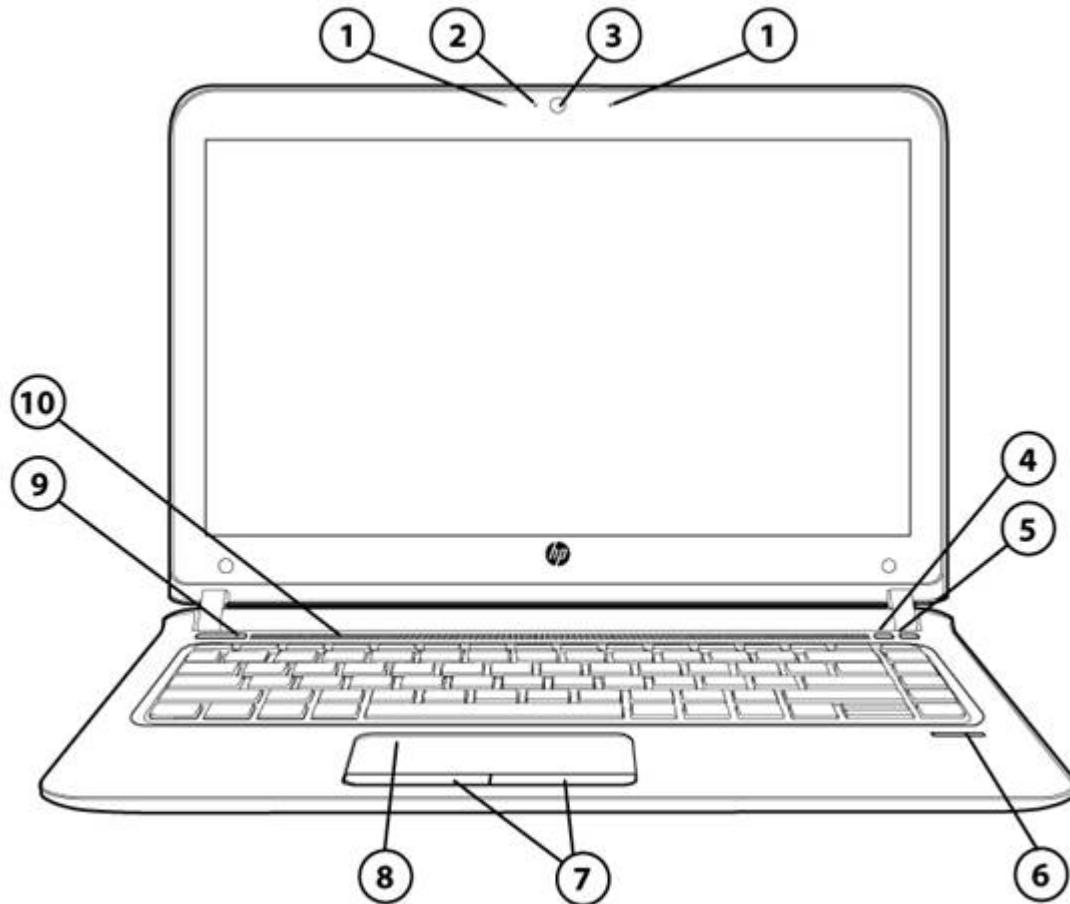

Front


- | | | | |
|----|------------------------|-----|-----------------------|
| 1. | Microphones (2) | 6. | Fingerprint reader |
| 2. | Webcam light | 7. | Touchpad pick buttons |
| 3. | Webcam | 8. | Touchpad |
| 4. | Wireless on/off button | 9. | Power button |
| 5. | Speaker mute button | 10. | Speaker array |

Overview

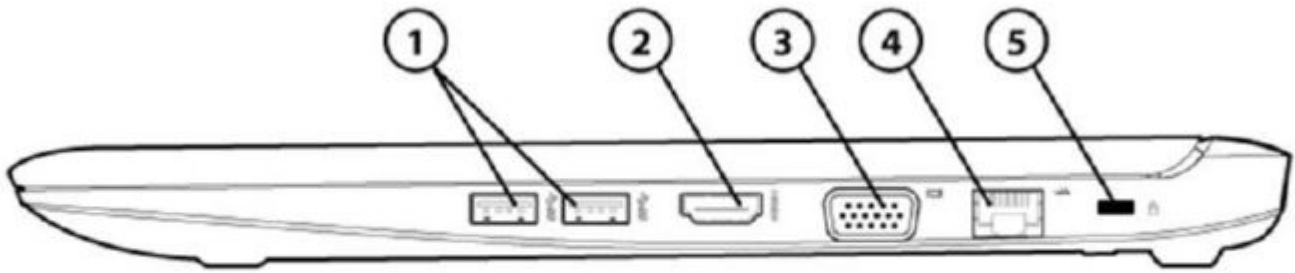

Right

- | | | | |
|----|---------------------------|----|-----------------------|
| 1. | USB 3.0 ports (2) | 4. | Ethernet port (RJ-45) |
| 2. | HDMI port | 5. | Security lock slot |
| 3. | External VGA monitor port | | |

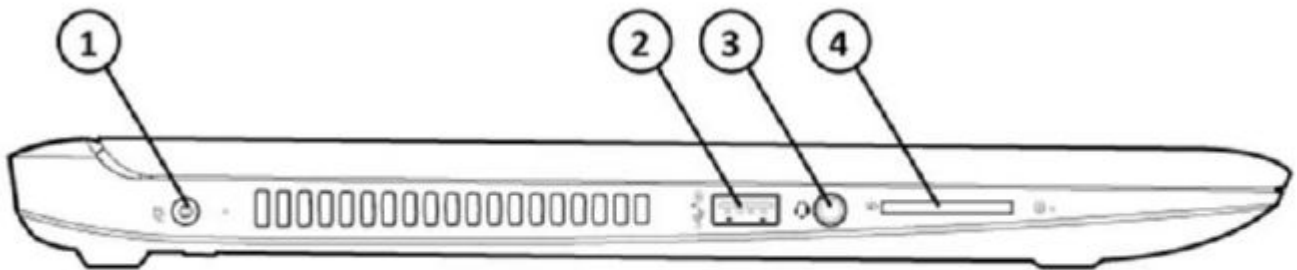


Left

- | | | | |
|----|---------------------------|----|---------------------------------|
| 1. | Power connector | 3. | Headphone/Microphone combo jack |
| 2. | USB 2.0 port (power port) | 4. | SD Card reader |

HP ProBook 440 G3 Notebook PC

Overview

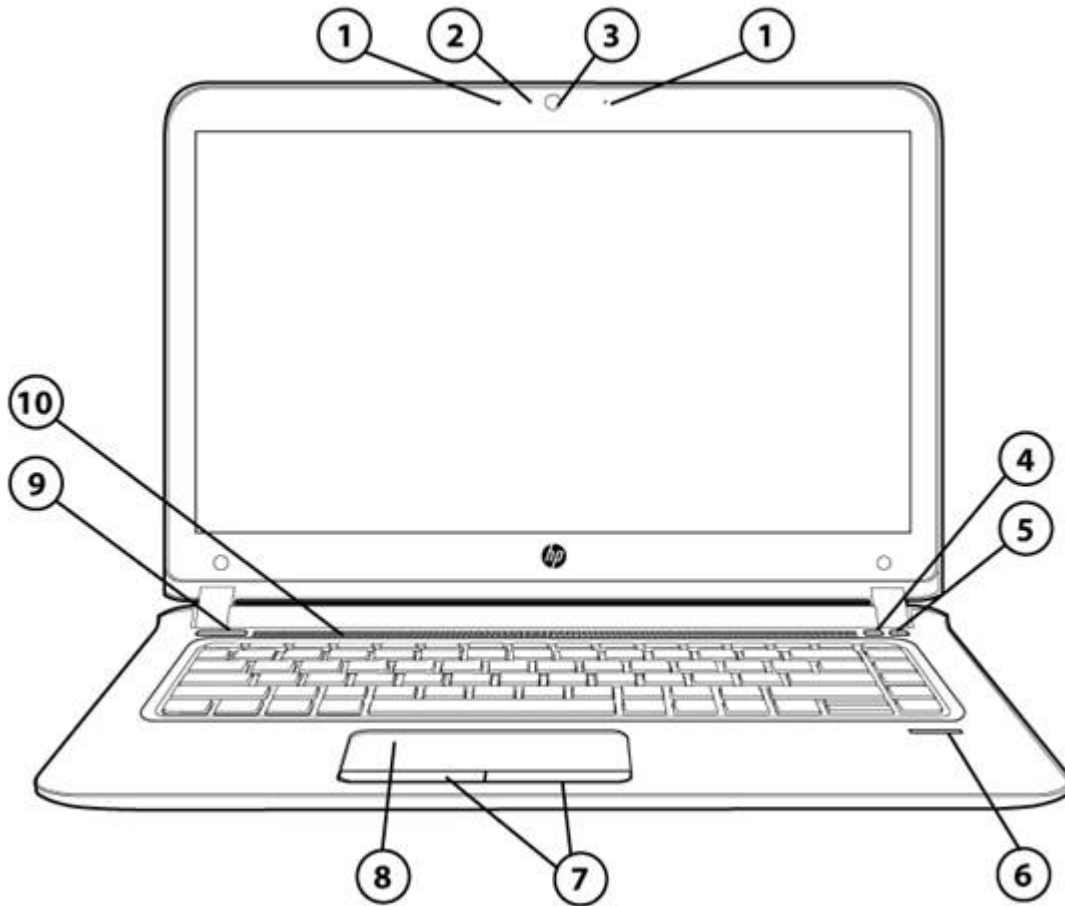


Front

- | | | | |
|----|------------------------|-----|-----------------------|
| 1. | Microphones (2) | 6. | Fingerprint reader |
| 2. | Webcam light | 7. | Touchpad pick buttons |
| 3. | Webcam | 8. | Touchpad |
| 4. | Wireless on/off button | 9. | Power button |
| 5. | Speaker mute button | 10. | Speaker array |


QuickSpecs

Overview

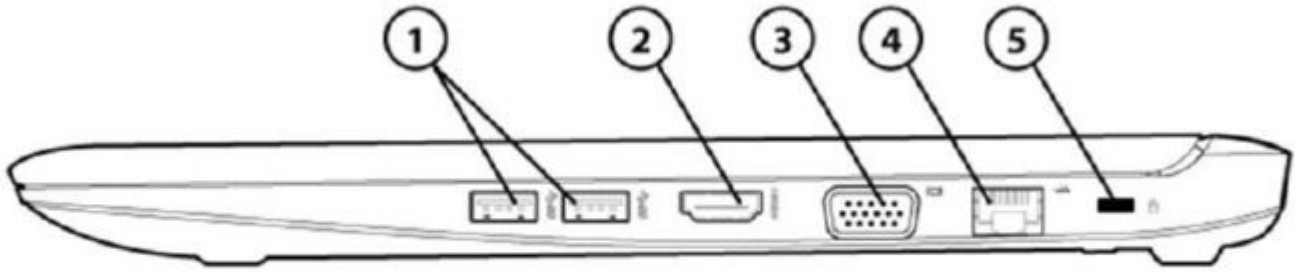

Right

- | | | | |
|----|---------------------------|----|-----------------------|
| 1. | USB 3.0 ports (2) | 4. | Ethernet port (RJ-45) |
| 2. | HDMI port | 5. | Security lock slot |
| 3. | External VGA monitor port | | |

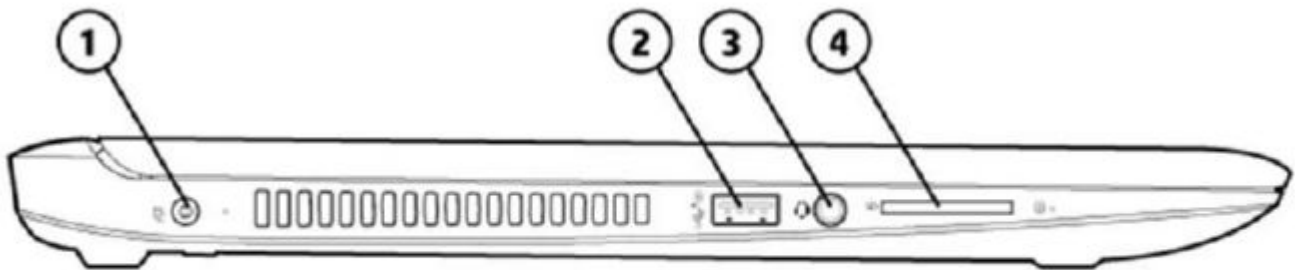


Left

- | | | | |
|----|---------------------------|----|---------------------------------|
| 1. | Power connector | 3. | Headphone/Microphone combo jack |
| 2. | USB 2.0 port (power port) | 4. | SD Card reader |

HP ProBook 450 G3 Notebook PC


Overview

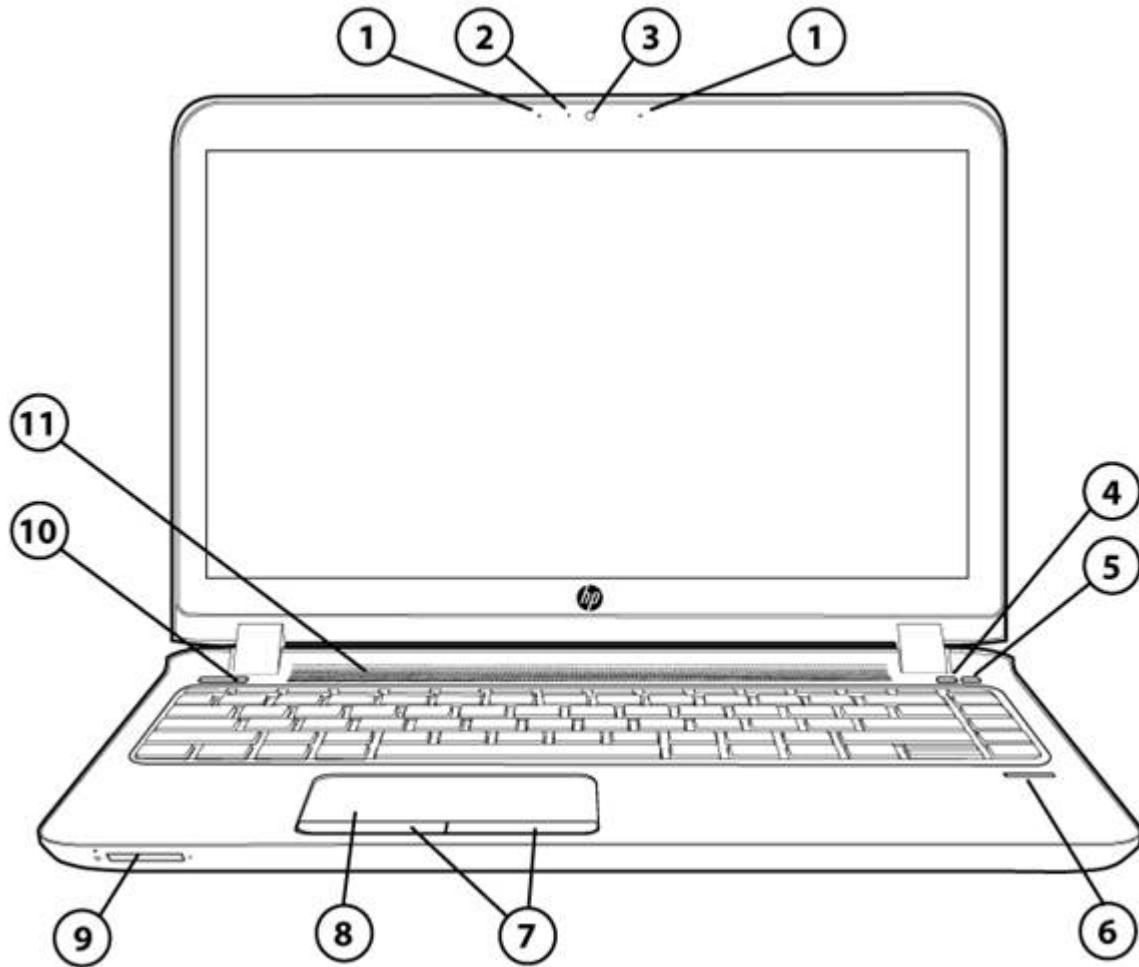

Front


- | | | | |
|----|------------------------|-----|-----------------------|
| 1. | Microphones (2) | 7. | Touchpad pick buttons |
| 2. | Webcam light | 8. | Touchpad |
| 3. | Webcam | 9. | SD Card reader |
| 4. | Wireless on/off button | 10. | Power button |
| 5. | Speaker mute button | 11. | Speaker array |
| 6. | Fingerprint reader | | |

Overview

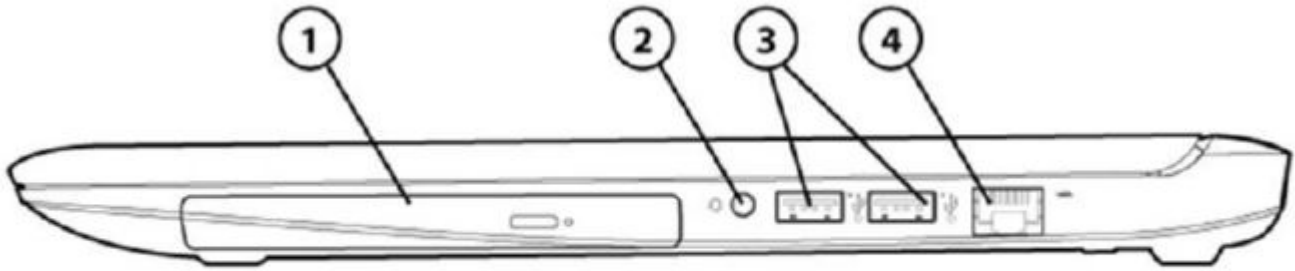

Right

- | | | | |
|----|---------------------------------|----|-----------------------|
| 1. | Optical drive | 4. | Ethernet port (RJ-45) |
| 2. | Headphone/Microphone combo jack | | |
| 3. | USB 2.0 ports (2) | | |

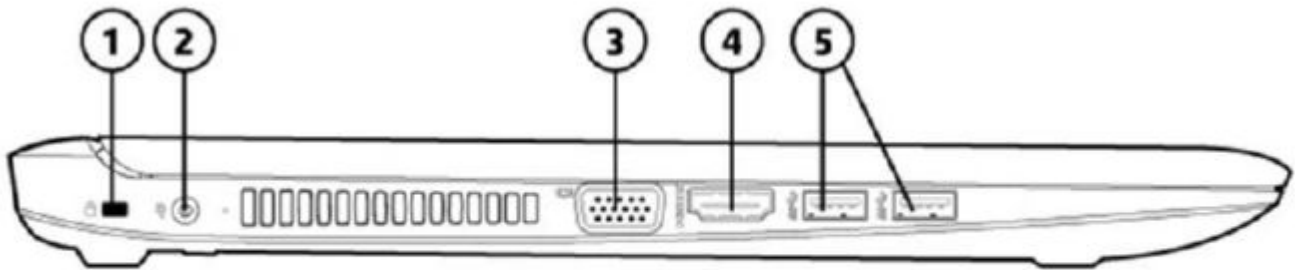


Left

- | | | | |
|----|---------------------------|----|-------------------|
| 1. | Security lock slot | 4. | HDMI port |
| 2. | Power connector | 5. | USB 3.0 ports (2) |
| 3. | External VGA monitor port | | |

HP ProBook 470 G3 Notebook PC


Overview

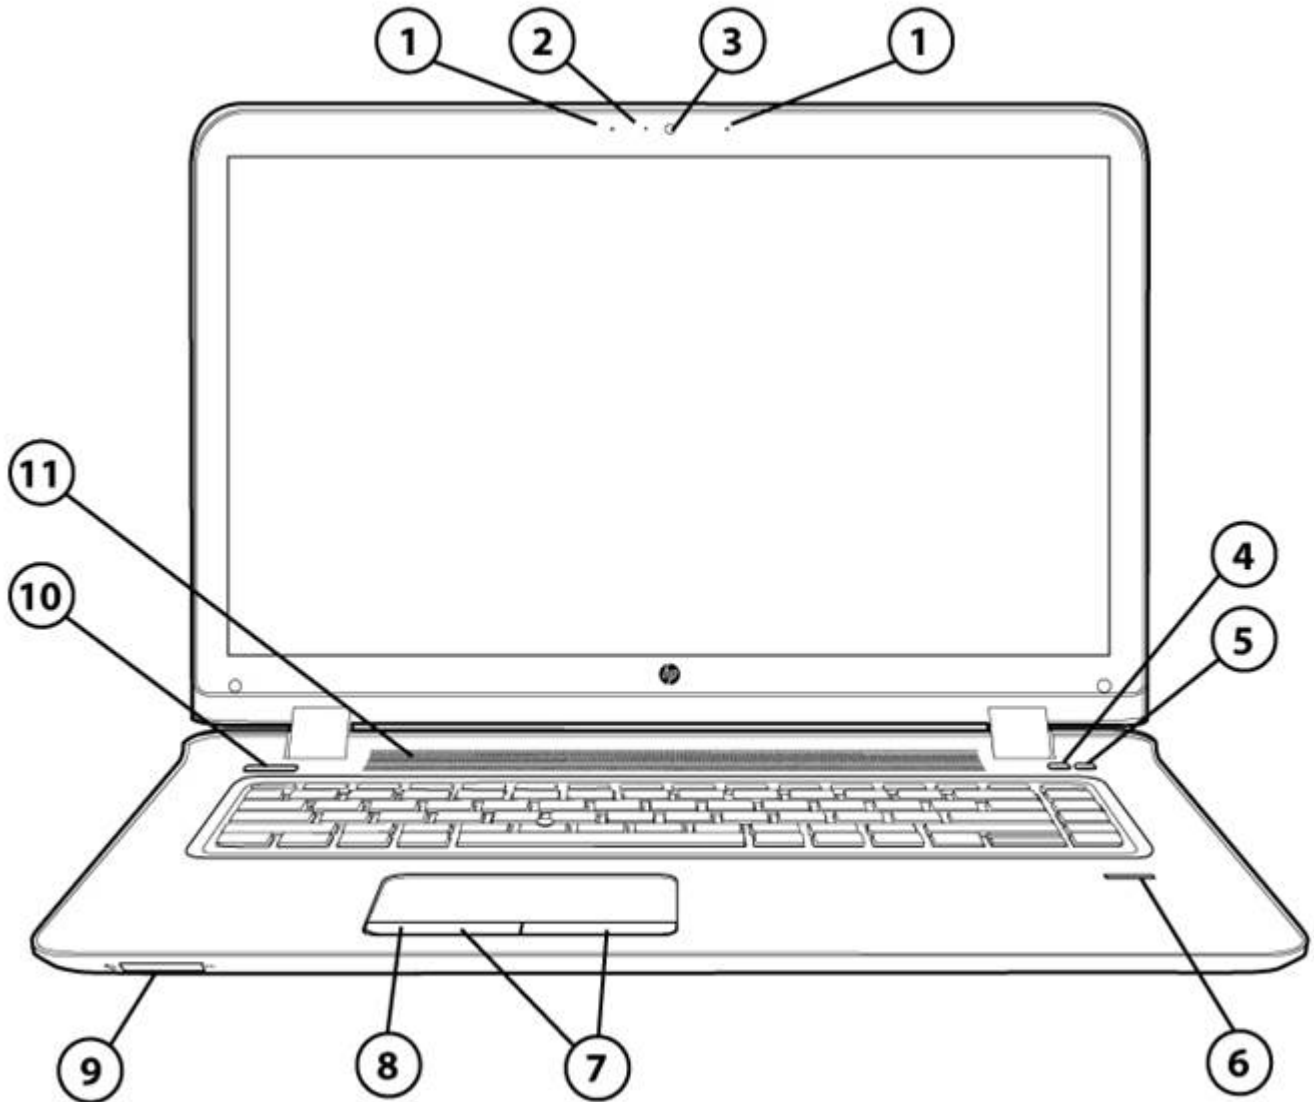

Front


- | | | | |
|----|------------------------|-----|-----------------------|
| 1. | Microphones (2) | 7. | Touchpad pick buttons |
| 2. | Webcam light | 8. | Touchpad |
| 3. | Webcam | 9. | SD card reader |
| 4. | Wireless on/off button | 10. | Power button |
| 5. | Mute button | 11. | Speaker array |
| 6. | Fingerprint reader | | |

Overview

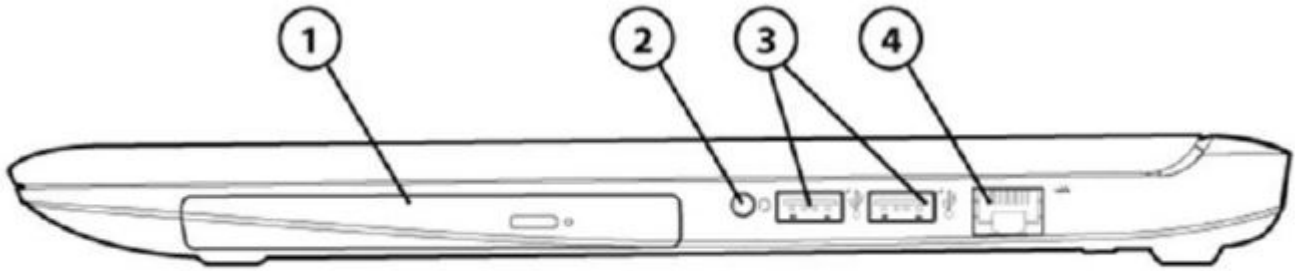

Right

- | | | | |
|----|---------------------------------|----|-----------------------|
| 1. | Optical drive | 3. | USB 2.0 ports (2) |
| 2. | Headphone/Microphone combo jack | 4. | Ethernet port (RJ-45) |

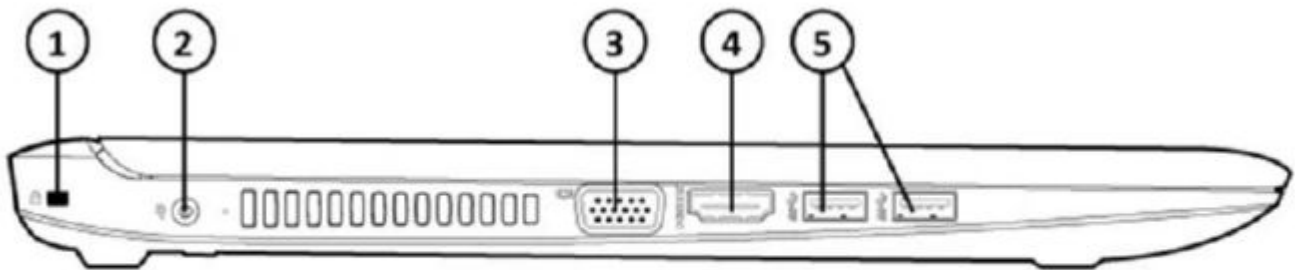

Left

- | | | | |
|----|---------------------------|----|-------------------|
| 1. | Security lock slot | 4. | HDMI port |
| 2. | Power connector | 5. | USB 3.0 ports (2) |
| 3. | External VGA monitor port | | |

Overview

At a Glance

- Windows 10, Windows 8.1, Windows 7 editions or FreeDOS 2.0
- Choice of Intel® Core or Intel® Pentium® processors
- Full size HP Premium Keyboard, spill-resistant keyboard with a thin layer of Mylar film to prevent minor spills; full separate numeric keypad
- Separate launch buttons provide easy access to wireless on/off and speaker mute.
- Function keys provide control of features including: standby mode, display brightness, external display, microphone mute, volume down, volume up, and backlight toggle for backlit keyboard (select models only).
- Larger Touchpad with gestures support, on/off button with LED indicator
- Enhanced security features with preinstalled software and hardware options
- Optional HD webcam with dual-microphone array for video conferencing
- HDMI port for connecting to high-resolution displays
- HD audio with DTS Studio Sound
- Choice of 13.3" diagonal, 14" diagonal, 15.6" diagonal or 17.3" diagonal flat screens or 13.3" diagonal, 14" diagonal, 15.6" diagonal Touch screens
- Flexible wireless connectivity options
- Battery life up to xx hours and xx minutes
- Choice of HP 4-cell, 44 WHr Li-ion battery or optional HP 6-cell, Long Life 55 WHr Li-ion battery

NOTE: See important legal disclosures for all listed specs in their respective features sections.

Technical Specifications

PRODUCT NAMES

HP ProBook 430 G3 Notebook PC
HP ProBook 440 G3 Notebook PC
HP ProBook 450 G3 Notebook PC
HP ProBook 470 G3 Notebook PC

OPERATING SYSTEMS

Preinstalled	Windows 10 Pro 64 ¹ Windows 10 Home 64 ¹ Windows 8.1 Pro 64 ¹ Windows 8.1 64 ¹ Windows 7 Professional 64 (available through downgrade rights from Windows 10 Pro) ² Windows 7 Professional 32 (available through downgrade rights from Windows 10 Pro) ² Windows 7 Professional 64 ¹ Windows 7 Professional 32 ¹ FreeDOS 2.0
Web only support	Windows 10 Enterprise 64 ¹ Windows 8.1 Enterprise 64 ¹ Windows 7 Enterprise 64 ¹ Windows 7 Enterprise 32 ¹

1. Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.microsoft.com>.
2. This system is preinstalled with Windows 7 Professional software and also comes with a license and media for Windows 10 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

PROCESSORS

Technical Specifications

HP ProBook 430 G3

Intel® Core i7-6500U with Intel® HD Graphics 520 (2.5 GHz, up to 3.1 GHz with Intel® Turbo Boost Technology, 4 MB cache, 2 cores)^{1,2}

Intel® Core i5-6300U with Intel® HD Graphics 520 (2.4 GHz, up to 3 GHz with Intel® Turbo Boost Technology, 3 MB cache, 2 cores)^{1,2}

Intel® Core i5-6200U with Intel® HD Graphics 520 (2.3 GHz, up to 2.8 GHz with Intel® Turbo Boost Technology, 3 MB cache, 2 cores)^{1,2}

Intel® Core i3-6100U with Intel® HD Graphics 520 (2.3 GHz, 3 MB cache, 2 cores)^{1,2}

Intel® Pentium® 4405U with Intel® HD Graphics 510 (2.1 GHz, 2 MB cache, 2 cores)^{1,2}

HP ProBook 440 G3

Intel® Core i7-6500U with Intel® HD Graphics 520 (2.5 GHz, up to 3.1 GHz with Intel® Turbo Boost Technology, 4 MB cache, 2 cores)^{1,2}

Intel® Core i5-6300U with Intel® HD Graphics 520 (2.4 GHz, up to 3 GHz with Intel® Turbo Boost Technology, 3 MB cache, 2 cores)^{1,2}

Intel® Core i5-6200U with Intel® HD Graphics 520 (2.3 GHz, up to 2.8 GHz with Intel® Turbo Boost Technology, 3 MB cache, 2 cores)^{1,2}

Intel® Core i3-6100U with Intel® HD Graphics 520 (2.3 GHz, 3 MB cache, 2 cores)^{1,2}

Intel® Pentium® 4405U with Intel® HD Graphics 510 (2.1 GHz, 2 MB cache, 2 cores)^{1,2}

HP ProBook 450 G3

Intel® Core i7-6500U with Intel® HD Graphics 520 (2.5 GHz, up to 3.1 GHz with Intel® Turbo Boost Technology, 4 MB cache, 2 cores)^{1,2}

Intel® Core i5-6200U with Intel® HD Graphics 520 (2.3 GHz, up to 2.8 GHz with Intel® Turbo Boost Technology, 3 MB cache, 2 cores)^{1,2}

Intel® Core i3-6100U with Intel® HD Graphics 520 (2.3 GHz, 3 MB cache, 2 cores)^{1,2}

Intel® Pentium® 4405U with Intel® HD Graphics 510 (2.1 GHz, 2 MB cache, 2 cores)^{1,2}

HP ProBook 470 G3

Intel® Core i7-6500U with Intel® HD Graphics 520 (2.5 GHz, up to 3.1 GHz with Intel® Turbo Boost Technology, 4 MB cache, 2 cores)^{1,2}

Intel® Core i5-6200U with Intel® HD Graphics 520 (2.3 GHz, up to 2.8 GHz with Intel® Turbo Boost Technology, 3 MB cache, 2 cores)^{1,2}

Intel® Core i3-6100U with Intel® HD Graphics 520 (2.3 GHz, 3 MB cache, 2 cores)^{1,2}

1. Multi-Core is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. 64-bit computing on Intel® architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel® 64 architecture. Processors will not operate (including 32-bit operation) without an Intel® 64 architecture-enabled BIOS. Performance may vary depending on your hardware and software configurations. Intel's numbering is not a measurement of higher performance.

2. HD content required to view HD images.

NOTE: Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

CHIPSET

Integrated with processor

GRAPHICS



Technical Specifications

Integrated

Intel® HD Graphics 520¹

Intel® HD Graphics 510¹

NOTE: View processor section for details.

Discrete²

HP ProBook 440/450/470 G3

AMD Radeon R7 M340 (1 or 2 GB DDR3 dedicated, switchable)

1. HD content required to view HD images.

2. AMD Dynamic Switchable Graphics technology requires either an AMD "A" series APU or an Intel processor, plus optional AMD Radeon discrete graphics configuration and is not available on FreeDOS and Linux OS. With AMD Dynamic Switchable Graphics technology, full enablement of all discrete graphics video and display features may not be supported on all systems (e.g. OpenGL applications will run on the integrated GPU or the APU as the case may be)

DISPLAYS

HP ProBook 430 G3

Internal

Non-Touch

13.3" diagonal HD¹ anti-glare LED-backlit (1366 x 768)

Touch

13.3" diagonal HD¹ LED-backlit touch screen (1366 x 768)

NOTE: Only available with Windows 10 or Windows 8.1.

External

Up to 32-bit per pixel color depth

VGA

Port supports resolutions up to 2048 x 1536 external resolution @60 Hz

HDMI

Supports direct connection to high-definition displays with up to 4096 x 2160 @24 Hz resolution and 7-channel audio with one convenient cable (Cable not included.)

HP ProBook 440 G3

Internal

Non-Touch

14" diagonal HD¹ anti-glare LED-backlit (1366 x 768)

14" diagonal full HD¹ anti-glare slim LED-backlit (1920 x 1080)

Touch

14" diagonal HD¹ LED-backlit touch screen (1366 x 768)

NOTE: Only available with Windows 10 or Windows 8.1.

External

Up to 32-bit per pixel color depth

VGA

Port supports resolutions up to 2048 x 1536 external resolution @60 Hz

HDMI

Supports direct connection to high-definition displays with up to 4096 x 2160 @24 Hz resolution and 7-channel audio with one convenient cable (Cable not included.)

HP ProBook 450 G3

Internal

Non-Touch

15.6" diagonal HD¹ anti-glare flat LED-backlit (1366 x 768)

15.6" diagonal full HD¹ anti-glare slim LED-backlit (1920 x 1080)

Touch

Technical Specifications

15.6" diagonal HD¹ flat LED-backlit touch screen (1366 x 768)

External

Up to 32-bit per pixel color depth

VGA

Port supports resolutions up to 2048 x 1536 external resolution @ 60 Hz

HDMI

Supports direct connection to high-definition displays with up to 4096 x 2160 @24 Hz resolution and 7-channel audio with one convenient cable (not included)

HP ProBook 470 G3

Internal

Non-Touch

17.3" diagonal HD+¹ SVA anti-glare flat LED backlit (1600 x 900)

17.3" diagonal FHD anti-glare flat LED backlit (1920 x 1080)

External

Up to 32-bit per pixel color depth

VGA

Port supports resolutions up to 2048x1536 external resolution @ 60 Hz

HDMI

Supports direct connection to high-definition displays with up to 4096 x 2160 @24 Hz resolution and 7-channel audio with one convenient cable (not included)

1. HD content required to view HD images.

NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.

STORAGE AND DRIVES

Primary Storage Bay

HP 3D DriveGuard (Windows only)

HP ProBook 430 and 440 G3

Hard Drives

Supports SATA, 7mm, 2.5" Hard Drives

500 GB - 5400 RPM Hard Drive

500 GB - 5400 RPM Solid State Hard Drive (8 GB Cache)

500 GB - 7200 RPM Hard Drive

1 TB - 5400 RPM Hard Drive

HP ProBook 450 and 470 G3

Hard Drives

Supports SATA, 7mm/9.5mm, 2.5" Hard Drives

500 GB - 5400 RPM Hard Drive

500 GB - 5400 RPM Solid State Hard Drive (8 GB Cache)

500 GB - 7200 RPM Hard Drive

1 TB - 5400 RPM Hard Drive

2 TB - 5400 RPM Hard Drive

HP 3D DriveGuard (Windows only)

The hard drive is mounted directly to the notebook frame, reducing the transmission of shock to the hard drive

NOTE: For Solid State Drives or Hard Drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is limited. Up to 16 GB (for Windows 7) and up to 30 GB (for Windows 8.1 and 10) is reserved for system recovery software.

OPTICAL DRIVES

HP ProBook 430 and 440 G3

External

Technical Specifications

Support Optional¹ External USB Drive CD/DVD R/RW

HP ProBook 450 and 470 G3

Fixed Optional¹ Optical Drive

9.5mm SATA:

DVD-ROM¹

DVD+/-RW SuperMulti DL Drive^{1,2}

Blu-ray ROM DVD+/-RW SuperMulti DL Drive^{1,2}

Weight saver

1. Sold separately as an optional feature.
2. For Blu-ray drives, certain disc, digital connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-ray titles to play, they may require an HDMI digital connection and your display may require HDCP support. HD-DVD disks cannot be played on this drive. Note that DVD-RAM cannot read or write to 2.6 GB Single Sided/5.2 GB Double Sided - Version 1.0 media. Actual speeds vary. Don't copy copyright-protected materials. Double Layer discs can store more data than single layer discs; discs burned with this drive may not be compatible with many existing single-layer DVD drives and players.

MEMORY

Two SODIMM slots

Both slots are customer accessible / upgradeable

DDR3L PC3-12800 (Transfer rates up to 1600 MT/s)

Supports Dual Channel Memory

Standard

2048 MB Total System Memory (2048 MB x 1)

4096 MB Total System Memory (4096 MB x 1)

6144 MB Total System Memory (4096 MB + 2048 MB) (Dual Channel)

8192 MB Total System Memory (4096 MB x 2) (Dual Channel)

8192 MB Total System Memory (8192 MB x 1)

12288 MB Total System Memory (8192 MB + 4096 MB) (Dual Channel)

16384 MB Total System Memory (8192 MB x 2) (Dual Channel)

Maximum

Upgradeable to 16384 MB in slots 1 and 2

Dual-channel

Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

NOTE: Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. With Windows Starter 32-bit operating systems, the amount of usable memory is dependent upon your configuration, so that above : all memory may not be available due to system resource requirements.

NETWORKING/COMMUNICATIONS

Technical Specifications

HP ProBook 430 G3

Broadband Wireless (WWAN)^{1,2}

HP hs3110 HSPA+ Mobile Broadband

HP It4110 LTE/HSPA+ 4G Mobile Broadband³

Wireless LAN (WLAN)^{1,2}

Realtek 802.11b/g/n (1x1)

Realtek 802.11b/g/n (1x1) and Bluetooth® 4.0 Combo

Broadcom 802.11b/g/n (1x1) and Bluetooth® 4.0 Combo

Broadcom 802.11a/b/g/n (2x2) and Bluetooth® 4.0 Combo

Intel® Dual Band Wireless-AC 3165 802.11a/b/g/n/ac (1x1) WiFi and Bluetooth® 4.0 Combo

Intel® Dual Band Wireless-AC 8260 802.11a/b/g/n/ac (2x2) WiFi and Bluetooth® 4.2 Combo

HP ProBook 440 G3

Wireless LAN (WLAN)^{1,2}

Realtek 802.11b/g/n (1x1)

Realtek 802.11b/g/n (1x1) and Bluetooth® 4.0 Combo

Broadcom 802.11b/g/n (1x1) and Bluetooth® 4.0 Combo

Broadcom 802.11a/b/g/n (2x2) and Bluetooth® 4.0 Combo

Intel® Dual Band Wireless-AC 3160 802.11a/b/g/n/ac (1x1) WiFi and Bluetooth® 4.0 Combo

Intel® Dual Band Wireless-AC 3165 802.11a/b/g/n/ac (1x1) WiFi and Bluetooth® 4.0 Combo

Intel® Dual Band Wireless-AC 8260 802.11a/b/g/n/ac (2x2) WiFi and Bluetooth® 4.2 Combo

HP ProBook 450 G3

Broadband Wireless (WWAN)^{1,2}

HP hs3110 HSPA+ Mobile Broadband

HP It4110 LTE/HSPA+ 4G Mobile Broadband³

Wireless LAN (WLAN)¹

Realtek 802.11b/g/n (1x1)

Realtek 802.11b/g/n (1x1) and Bluetooth® 4.0 Combo

Broadcom 802.11b/g/n (1x1) and Bluetooth® 4.0 Combo

Broadcom 802.11a/b/g/n (2x2) and Bluetooth® 4.0 Combo

Intel® Dual Band Wireless-AC 3165 802.11a/b/g/n/ac (1x1) WiFi and Bluetooth® 4.0 Combo

Intel® Dual Band Wireless-AC 8260 802.11a/b/g/n/ac (2x2) WiFi and Bluetooth® 4.2 Combo

HP ProBook 470 G3

Wireless LAN (WLAN)^{1,2}

Realtek 802.11b/g/n (1x1)

Realtek 802.11b/g/n (1x1) and Bluetooth® 4.0 Combo

Broadcom 802.11b/g/n (1x1) and Bluetooth® 4.0 Combo

Broadcom 802.11a/b/g/n (2x2) and Bluetooth® 4.0 Combo

Intel® Dual Band Wireless-AC 3165 802.11a/b/g/n/ac (1x1) WiFi and Bluetooth® 4.0 Combo

Intel® Dual Band Wireless-AC 8260 802.11a/b/g/n/ac (2x2) WiFi and Bluetooth® 4.2 Combo

1. [Wireless access point and Internet service required and sold separately.](#)

Availability of public wireless access points limited.

2. Sold separately or as an optional feature.

3. 4G LTE not available on all products, and in all regions.

Communications

Realtek Ethernet (10/100/1000)

NOTE: The term "10/100/1000" or "Gigabit" Ethernet indicates compatibility with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Giga Ethernet server and network infrastructure is required.

Technical Specifications

AUDIO/MULTIMEDIA

Audio

HD audio with DTS Studio Sound

Two stereo speakers

Integrated microphone (dual-microphone array when equipped with optional webcam)

Headphone/microphone combo jack

Webcam

Optional¹ 720p HD² webcam³

1. Sold separately as an optional feature.
2. HD content required to view HD images.
3. Internet access required.

KEYBOARDS/POINTING DEVICES/BUTTONS & FUNCTION KEYS

HP Premium Keyboard

The HP spill-resistant keyboard is designed using a thin layer of Mylar film under the keyboard. The 101/102-key corr right control and alt keys, and function keys. US and International key layouts are available.

Includes a separate numeric keypad (HP ProBook 450 and 470 only.)

Backlit keyboard available as an option.

Buttons and Function Keys

Separate launch buttons provide easy access to wireless on/off and speaker mute. Function keys provide control of f and backlight toggle for backlit keyboard (select models only).

Function Keys

ESC: system information

F1 - Sleep

F2 - Blank

F3 - Backlight Toggle (for backlit keyboard) or Blank

F4 - Display Switching

F5 - Brightness Down

F6 - Brightness Up

F7 - Blank

F8 - Volume Down

F9 - Volume Up

F10 - Mic Mute

F11 - Blank

F12 - NumLock (430/440); Blank (450/470)

Hidden Fuctions

o Fn+R --> Break

o Fn+S --> Sys Rq

o Fn+C --> Scroll Lock

Pointing Devices

Touchpad with gestures support, on/off button with LED indicator, two-way scroll, two pick buttons

Technical Specifications

Touchpad

On/off button (on board)
Taps enabled as default

Gestures

Enabled by default

2 Finger Scrolling
2 Finger Zoom (Pinch)
OSD (enable/disable)
Win8 2 Finger tap = right click
Win8 Edge Swipes

Disabled by default

3 Finger Flick
2 Finger Rotate
Momentum Motion
1 Finger Vertical Scroll

SOFTWARE AND SECURITY

Preinstalled Software

BIOS

HP BIOSphere¹
HP DriveLock | HP Automatic DriveLock
HP BIOS Protection²
Master Boot Record Security
Power On Authentication
Pre-Boot Security
Secure Erase³
Hybrid Boot (Windows 8.1 & later)
Measure Boot (Windows 8.1 & later)
Secure Boot (Windows 8.1 & later)
Absolute Persistence Module⁴

Multi Media

Cyberlink Power DVD, BD
Cyberlink Power2Go (Secure Burn)
Cyberlink YouCam BE (Windows 7 only)

Communication

HP GPS and Location (Windows 7 only)⁵
HP Connection Manager with support for HP Mobile Connect (Windows 7 only)⁶
HP Mobile Connect (Windows 8.1 & later)⁶
Intel® Wireless Display (WiDi) Software for Windows⁷
Native Miracast Support⁸

HP Value Add Software

HP 3D DriveGuard
HP ePrint Driver⁹
HP Hotkey

Technical Specifications

HP Recovery Manager
HP Recovery Disc Creator
HP Unified Recovery Manager (Windows 8.1 and 10 only)
HP Registration App (Windows 8.1 & later)
HP Support Assistant
HP Noise Reduction Software

3rd Party

Foxit PhantomPDF Express for HP
HP Caller Dashboard Built by Thug Labs

Microsoft Products

Buy Office
Bing Search
Skype¹⁰

Manageability

HP Driver Packs¹¹
HP SoftPaq Download Manager (SDM)
HP System Software Manager (SSM)¹¹
HP BIOS Config Utility (BCU)¹¹
HP Client Catalog¹¹
HP CIK for Microsoft SCCM¹¹
LANDESK Management¹²

For more information on HP Client Management Solutions refer to: <http://www.hp.com/go/clientmanagement>.

Client Security Software

Absolute Persistence Module
HP Drive Encryption¹³
HP Security Manager
Microsoft Security Essentials ¹⁴
Microsoft Defender

Security

Pre-boot Authentication
Security lock slot (Lock sold separately.)
Optional¹⁵ Fingerprint Reader
TPM

NOTE: The Absolute Persistence agent is shipped turned off, and must be activated by customers when they purchase a subscription. Subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S.

For more information on HP Client Security Software Suite, refer to <http://www.hp.com/go/clientsecurity>.

1. Available only on business PCs with HP BIOS.
2. May require a manual recovery step if all copies of BIOS are compromised or deleted.
3. For the methods outlined in the National Institute of Standards and Technology Special Publication 800-

Technical Specifications

88.

4. Absolute agent is shipped turned off, and will be activated when customers activate a purchased subscription. Subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S. The Absolute Recovery Guarantee is a limited warranty. Certain conditions apply. For full details visit: <http://www.absolute.com/company/legal/agreements/computrace-agreement>. Data Delete is an optional service provided by Absolute Software. If utilized, the Recovery Guarantee is null and void. In order to use the Data Delete service, customers must first sign a Pre-Authorization Agreement and either obtain a PIN or purchase one or more RSA SecurID tokens from Absolute Software.

5. GPS access requires an unobstructed path to multiple satellites. Performance may be affected if/when used inside of buildings, bridges or heavily congested metropolitan areas. Requires separately purchased GPS navigation software available from multiple GPS applications.

6. HP Mobile Connect is only available on preconfigured devices with WWAN. For geographic availability refer to <http://www.hp.com/go/mobileconnect>

7. Integrated Intel® Wi-Di Display is available on select configurations only and requires a separate projector, TV or monitor with an integrated or external Wi-Di receiver. For more information on Intel® Wi-Di Display visit <http://www.intel.com/go/wirelessdisplay>

8. Miracast is a wireless technology your PC can use to project your screen to TVs, projectors, and streaming media players that also support Miracast. You can use Miracast to share what you're doing on your PC and present a slide show. For more information: <http://windows.microsoft.com/en-us/windows-8/project-wireless-screen-miracast>

9. Requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see <http://www.hp.com/go/eprintcenter>). Requires optional broadband module. Broadband use requires separately purchased service contract. Check with service provider for coverage and availability in your area. Separately purchased data plans or usage fees may apply. Print times and connection speeds may vary.

10. Skype is not offered in China.

11. Not preinstalled, however available on manageability website.

12. Subscription required.

13. Data is protected prior to Drive Encryption login. Turning the PC off or into hibernate logs out of Drive Encryption and prevents data access.

14. Opt in and internet connection required for updates.

15. Sold separately as an optional feature.

POWER

Power Supply

HP ProBook 430 /440 /450 G3

45 W Smart AC adapter

45 W Smart AC adapter 2-prong (Japan only)

65 W EM Smart AC adapter (China and India only)

HP ProBook 470 G3

65 W Smart AC adapter

65 W EM Smart AC adapter (PRC and India only)

Battery

HP 4-cell, 44 WHr Li-ion

Optional¹ HP 6-cell, Long Life 55 WHr Li-ion

(HP Fast Charge is available on 6-cell battery only.)

1. Sold separately as an optional feature.

Battery Time



Technical Specifications

	Configurations with integrated graphics (Windows 8.1)	Configurations with discrete graphics (Windows 8.1)
HP ProBook 430 G3		
HP 4-cell (44 WHr) battery	Up to 9 hours ¹	NA
HP 6-cell (55 WHr) long life battery	Up to 10 hours ¹	NA
HP ProBook 440 G3		
HP 4-cell (44 WHr) battery	Up to 9 hours ¹	Up to 8 hours 45 min ¹
HP 6-cell (55 WHr) long life battery	Up to 10 hours ¹	Up to 9 hours 45 min ¹
HP ProBook 450 G3		
HP 4-cell (44 WHr) battery	Up to 8 hours 30 min ¹	Up to 8 hours 15 min ¹
HP 6-cell (55 WHr) long life battery	Up to 9 hours 15 min ¹	Up to 9 hours ¹
HP ProBook 470 G3		
HP 4-cell (44 WHr) battery	NA	Up to 8 hours ¹
HP 6-cell (55 WHr) long life battery	NA	Up to 9 hours 30 min ¹

- Windows 8.1 battery life will vary depending on various factors including product model, configuration, loaded applications, features, use, wireless functionality, and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See www.bapco.com for additional details.

System Standby Time

4-cell (44 WHr) battery	Up to 15 days
6-cell (55 WHr) long life battery	Up to 16 days

NOTE: Standby time will vary depending on various factors including battery, Memory, CPU, EC and LAN chip. The maximum capacity of the battery will naturally decrease with time and usage.

Power Conservation

Supports enhanced Intel SpeedStep technology (allows Battery Optimized Mode, Maximum Performance Mode, or Automatic mode)
AMD PowerPlay technology (discrete models)
Hibernation
Standby
ACPI compliance

WEIGHTS & DIMENSIONS

Technical Specifications

HP ProBook 430 G3

Weight

Starting at 3.31 lbs (1.5 kg)

Dimensions

Non-Touch

12.83 x 9.19 x 0.78 to 0.83 in (front to rear)

32.6 x 23.35 x 1.99 to 2.09 cm (front to rear)

Touch

12.83 x 9.2 x 0.84 to 0.88 in (front to rear)

32.6 x 23.37 x 2.14 to 2.24 cm (front to rear)

HP ProBook 440 G3

Weight

Starting at 3.69 lbs (1.68 kg)

Dimensions

Non-Touch

13.35 x 9.61 x 0.78 to 0.83 in (front to rear)

33.92 x 24.4 x 1.99 to 2.09 cm (front to rear)

Touch

13.35 x 9.61 x 0.85 to 0.89 in (front to rear)

33.92 x 24.42 x 2.15 to 2.25 cm (front to rear)

HP ProBook 450 G3

Weight

Starting at 4.56 lbs (2.07 kg)

Dimensions

Non-Touch

14.88 x 10.41 x 0.94 to 0.98 in

37.8 x 26.43 x 2.38 to 2.48 cm (front to rear)

Touch

14.88 x 10.42 x 1 to 1.04 in (front to rear)

37.8 x 26.46 x 2.55 to 2.65 cm (front to rear)

HP ProBook 470 G3

Weight

Starting at 5.75 lbs (2.61 kg)

Dimensions

Non-Touch

16.41 x 11.44 x 0.98 to 1.02 in (front to rear)

41.68 x 29.05 x 2.5 to 2.6 cm (front to rear)

NOTE: Height varies depending upon where on the notebook the measurement is made.
Weight varies by configuration and components.

PORTS/SLOTS

Technical Specifications

Ports

430/440

- 2 USB 3.0
- 1 USB 2.0 (power port)
- 1 HDMI
- 1 headphone/microphone combo
- 1 AC power
- 1 RJ-45
- 1 VGA

450/470

- 2 USB 3.0
- 2 USB 2.0
- 1 HDMI
- 1 headphone/microphone combo
- 1 AC power
- 1 RJ-45
- 1 VGA

NOTE: All cables are not included and sold separately.

Digital Media Slots

- Multi Media Reader Slot
- Supports SD, SDHC, SDXC

SERVICE AND SUPPORT

HP Services offers 3 year, 1 year and 90 day limited warranty options depending on country. 1 year limited warranty or primary battery. On-site service and optional extended service contracts are also available. Optional¹ HP Services² are extended service contracts which go beyond your standard limited warranties. For more details visit:

<http://www.hp.com/go/lookuptool>.

1. Sold separately or as an optional feature.
2. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. HP services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/cpc>.

System Unit

Technical Specifications

Stand-Alone Power Requirements (AC Power)	Nominal Operating Voltage	19 V	Win8	Max	
		Average Operating Power	Win 7		
	ProBook 440				
	Integrated graphics	6.78W		6.78W	38.88
	Discrete graphics	4.49W		4.49W	31.87W
	ProBook 450				
	Integrated graphics	8.89W		8.89W	3
	Discrete graphics	6.79W		6.79W	3
	ProBook 470	5.71W		5.71W	
	Discrete graphics				23.56W
Max Operating Power		Discrete < 90W			
		UMA < 65W			
Temperature	Operating	32° to 95° F (0° to 35° C) (not writing opti 41° to 95° F (5° to 35° C) (writing optical			
Relative Humidity	Non-operating	-4° to 140° F (-20° to 60° C)			
	Operating	10% to 90%, non-condensing			
Shock	Non-operating	5% to 95%, 101.6° F (38.7° C) maximur bulb temperature			
	Operating	40 G, 2 ms, half-sine			
Random Vibration	Non-operating	200 G, 2 ms, half-sine			
	Operating	0.75 grms			
Altitude (unpressurized)	Non-operating	1.50 grms			
	Operating	-50 to 10,000 ft (-15.24 to 3,048 m)			
Planned Industry Standard Certifications	Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)			
	UL	Yes			
	CSA	Yes			
	FCC Compliance	Yes			
	ENERGY STAR 6.0®	Select models*			
	EPEAT	Registered Gold in United States**			
	ICES	Yes			
	Australia /	Yes			
	NZ A-Tick Compliance				
	CCC	Yes			
	Japan VCCI Compliance	Yes			
	KC	Yes			
	BSMI	Yes			
	CE Marking Compliance	Yes			
BNCI or BELUS	Yes				
CIT	Yes				
GOST	Yes				
Saudi Arabian Compliance (ICCP)	Yes				
SABS	Yes				
UKRSERTCOMPUTER	Yes				

* Configurations of the HP ProBook 430 G3, HP ProBook 440 G3, HP ProBook 450 G3 and HP ProBook 470 G3 that are ENERGY STAR® qualified are identified as HP ProBook 430 G3 ENERGY STAR, HP ProBook 440 G3 ENERGY STAR, HP ProBook 450 G3 ENERGY STAR and HP ProBook 470 G3 ENERGY STAR on HP websites and on <http://www.energystar.gov>

** EPEAT® registration varies by country. See <http://www.epeat.net> for registration status by country. EPEAT status listed applies to U.S. For accessibility information on HP products, please visit: <http://www.hp.com/accessibility>.

Displays

Technical Specifications

13.3" diagonal HD1 anti-glare LED-backlit (1366 x 768)	Outline Dimensions (W x H x D)	314.6 x 189.2 mm max. (w/ bracket & PCB) D(Flat): 3.6mm max. D(Slim): 3.0mm max.
	Active Area	293.42 x 164.97 mm
	Weight	Flat: 290g max. Slim: 260 max.
	Diagonal Size	13.3"
	Surface Treatment	Anti-glare
	Contrast Ratio	300:1 (typ)
	Refresh Rate	60Hz
	Brightness	220 nit typ
	Pixel Resolution	1366 x 768 (HD)
	Interface	eDP 1.2 (1 lane)
	LCD Mode	SVA
	PPI	118
	Viewing Angle	SVA 45/45/25/35
	14" diagonal FHD anti-glare flat LED backlit (1920 x 1080)	Outline Dimensions (W x H x D)
Active Area		309.14x173.89
Weight		290g max. (To be updated w/ real measure data)
Diagonal Size		14.0"
Surface Treatment		Anti-glare
Contrast Ratio		300:1 (typ) - AG
Refresh Rate		60Hz
Brightness		220 nit typ
Pixel Resolution		1920 x 1080 (FHD)
Interface		eDP 1.2 (2 lane)
LCD Mode		SVA
PPI		157
Viewing Angle		SVA 45/45/25/35

Technical Specifications

14" diagonal LED HD (1366 x 768) anti-glare	Dimensions (W x H)	12.63 x 7.39 in (32.09 x 18.76 cm)		
	Weight	320g max.		
	Diagonal Size	14.0 in (35.6cm)		
	Surface Treatment	Anti-glare		
	Contrast Ratio	400:1 (typical)		
	Refresh Rate	60 Hz		
	Brightness	220 nit (typical)		
	Pixel Resolution	Pitch	0.227 mm	
		Format	1366 x 768	
		Configuration	RGB Stripe	
	Backlight	LED		
	PPI	112 ppi		
	Viewing Angle	±30° Horizontal, ±10° Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)		

15.6" diagonal HD SVA anti-glare flat LED backlit (1366 x 768)	Outline Dimensions (W x H x D)	360.0 x 224.3 x 3.8mm max.	
	Active Area	344.2 x 193.5	
	Weight	420 max.	
	Diagonal Size	15.6"	
	Surface Treatment	Anti-glare	
	Contrast Ratio	300:1 (typ) - AG	
	Refresh Rate	60Hz	
	Brightness	220 nit typ	
	Pixel Resolution	1366 x 768 (HD)	
	Interface	eDP 1.2 (1 lane)	
	LCD Mode	SVA	
	PPI	101	
	Viewing Angle	SVA 40/40/15/30	

15.6" diagonal FHD anti-glare flat LED backlit (1920 x 1080)	Outline Dimensions (W x H x D)	360.0 x 224.3 x 3.2mm max.	
	Active Area	344.16 x 193.59	
	Weight	370g max.	
	Diagonal Size	15.6"	
	Surface Treatment	Anti-glare	
	Contrast Ratio	300:1 (typ) - AG	
	Refresh Rate	60Hz	
	Brightness	220 nit typ	
	Pixel Resolution	1920 x 1080 (FHD)	
	Interface	eDP 1.2 (2 lane)	
	LCD Mode	SVA	
	PPI	142	

Technical Specifications

Viewing Angle SVA 45/45/25/35

17.3" diagonal HD+1 SVA anti-glare flat LED backlit (1600 x 900)	Outline Dimensions (W x H x D)	398.6 x 251 x 4.0 (max.) mm
	Active Area	382.08 x 214.92 mm
	Weight	550g max.
	Diagonal Size	17.3"
	Surface Treatment	Anti-glare
	Contrast Ratio	300:1 (typ)
	Refresh Rate	60Hz
	Brightness	220 nit typ
	Pixel Resolution	1600 x 900 (HD+)
	Interface	eDP1.3 w/o PSR (2-lane)

LCD Mode	SVA
PPI	106
Viewing Angle	40/40/15/30 (typ)

17.3" diagonal FHD anti-glare flat LED backlit (1920 x 1080)	Outline Dimensions (W x H x D)	400 x 233.3 x 4.0 (max.) mm
	Active Area	381.888 x 214.812
	Weight	550g max.
	Diagonal Size	17.3"
	Surface Treatment	Anti-glare
	Contrast Ratio	600:1 (typ)
	Refresh Rate	60Hz
	Brightness	300 nit typ
	Pixel Resolution	1920 x 1080 (FHD)
	Interface	eDP1.3 w/o PSR (2-lane)

LCD Mode	UWVA
PPI	128
Viewing Angle	85/85/85/85 (typ)

Storage and Drives

Technical Specifications

500 GB* 5400 rpm SATA Hard Drive	Drive Weight	0.22 lb (101 g)	
	Capacity	500 GB	
	Height	0.276 in (7 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	Synchronous 300 MB/s (Drive Capability) (maximum)	
	Seek Time (typical reads, including settling)	Single Track	3 ms
		Average	13 ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	976,773,168	
Operating Temperature	32° to 140° F (0° to 60° C) [case temp]		
Features	ATA Security		

500 GB* 5400 rpm SMART SATA II Hybrid HDD/SSHD	Drive Weight	0.209 lb (95 g)	
	Capacity	500 GB	
	Height	0.276 in (7 mm)	
	Width	2.76 in (70.1 mm)	
	Interface	ATA-8, SATA 2.6, 6.0 Gb/s, NCQ	
	Transfer Rate	Synchronous 600 MB/s (Drive Capability) (maximum)	
	Seek Time (typical reads, including settling)	Single Track	2 ms
		Average	12 ms
		Maximum	NIL ms
	Rotational Speed	5400 rpm	
	Logical Blocks	976,773,168	
Operating Temperature	32° to 140° F (0° to 60° C) [case temp]		
Features	ATA Security		

QuickSpecs

HP ProBook 430 G3 Notebook PC, HP ProBook
440 G3 Notebook PC, HP ProBook 450 G3
Notebook PC, , HP ProBook 470 G3 Notebook PC

Technical Specifications

500 GB* 7200 rpm SATA Hard Drive	Drive Weight	0.25 lbs (115g)	
	Capacity	500 GB	
	Height	0.276 in (7 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	Synchronous (maximum)	300 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	1.5 ms
		Average	11 ms
		Maximum	22 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	976,773,168	
Operating Temperature	32° to 140° F (0° to 60° C) [case temp]		
Features	ATA Security		

1 TB* 5400 rpm SATA Hard Drive	Drive Weight	117g	
	Capacity	1TB	
	Height	9.5mm	
	Width	70.1mm	
	Interface	ATA-8, SATA 3.0	
	Transfer Rate	Synchronous 600MB/s (maximum)	
	Seek Time (typical reads, including settling)	Single Track	2ms
		Average	12ms
		Maximum	22ms
	Rotational Speed	5400rpm	
	Logical Blocks	1,953,525,168	
Operating Temperature	0-60		
Features	ATA Security, S.M.A.R.T., NCQ, Ultra DMA		

2 TB* - 5400 RPM Hard Drive	Drive Weight	130g	
	Capacity	2TB	
	Height	9.5mm	
	Width	70.1mm	
	Interface	ATA-8, SATA 3.0	
	Transfer Rate	Synchronous (maximum)	600MB/s
	Seek Time (typical reads, including settling)	Single Track	2ms
		Average	12ms
		Maximum	22ms
	Rotational Speed	5400rpm	
	Logical Blocks	3,907,029,168	
Operating Temperature	0-60		
Features	ATA Security, S.M.A.R.T., NCQ, Ultra DMA		



Technical Specifications

Solid State Drives

SSD 128GB 2280 M2 SATA-3	Drive Weight	0.022 lb (10 g)	
	Capacity	128 GB	
	Height	0.14 in (3.7 mm)	
	Width	0.87 in (22 mm)	
	Interface	ATA-8, SATA 3.0	
	Performance	Maximum Sequential Read	Maximum Sequential Write
		Up to 520 MB/s	Up to 140 MB/s
	Logical Blocks	250069680	
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]	
	Features	DIPM; TRIM; DEVSLP	
Security Features	ATA Security		

SSD 256GB 2280 M2 SATA-3	Drive Weight	0.022 lb (10 g)	
	Capacity	256 GB	
	Height	0.14 in (3.58 mm)	
	Width	0.87 in (22 mm)	
	Interface	ATA-8, SATA 3.0	
	Performance	Maximum Sequential Read	Maximum Sequential Write
		Up to 520 MB/s	Up to 270 MB/s
	Logical Blocks	250069680	
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]	
	Features	DIPM; TRIM; DEVSLP	
Security Features	ATA Security		

Optical Drives

Technical Specifications

DVD+/-RW SuperMulti DL Drive	Access Times	Random	<140ms CD (typical) < 160 ms DVD (typical)
	Weight	170g max.	
	Max Data Transfer Rate	24X CD-ROM 8X DVD 24X CD-R 24X CD-RW 8X DVD+R 8X DVD+RW 8X DVD-R 6X DVD-RW 6X - DVD+R Dual Layer 6X - DVD-R Dual Layer 5X DVD-RAM	
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM, DVD+R DL, DVD-R DL	
	Max Media Capacity (read)	8.5 GB	
	Max Media Capacity (write)	8.5 GB	
	Transport	Tray Loading	

* Actual speeds may vary. Don't copy copyright-protected materials. Double Layer discs can store more data than single layer discs. Double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players. Note that DVD-RAM cannot read or write to 2.6GB Single Sided/5.2 GB Double Sided - Version 1.0 media.

Technical Specifications

Blu-ray ROM DVD+/- RW SuperMulti DL Drive*	Access Times	Random	<190 ms CD-ROM (typical) < 180ms DVD-ROM (typical) <230 ms BD-ROM (typical)
	Weight	170g max.	
	Max Data Transfer Rate	24X CD-ROM 8X DVD-ROM 24X CD-R 16X CD-RW 8X DVD+R 8X DVD+RW 8X DVD-R 6X DVD-RW 4X - DVD+R Dual Layer 4X - DVD-R Dual Layer 5X DVD-RAM 6X BD-ROM	
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, , CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW. DVD-RAM, BD-ROM, BD-R, BD-RE	
	Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+R DL, DVD+RW, DVD-R, DVD-R DL, DVD-RW, DVD-RAM	
	Max Media Capacity (read)	50.0 GB	
	Max Media Capacity (write)	8.5GB	
	Transport	Tray Loading	

* Actual speeds may vary. Don't copy copyright-protected materials. Double Layer discs can store more data than single layer discs. Double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players. Note that DVD-RAM cannot read or write to 2.6GB Single Sided/5.2 GB Double Sided - Version 1.0 media.

Technical Specifications

DVD-ROM Drive	Access Times	Random	< 140 ms CD (typical) < 160 ms DVD (typical)
	Max Data Transfer Rate	24X CD-ROM 8X-DVD	
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	Supported Media (write)	None	
	Max Media Capacity (read)	8.5GB	
	Transport	Tray Loading	

Security

HP Synaptics VFM 495 Fingerprint Reader (optional)	Mobile Voltage Operation	3.0V-3.6V Single Supply
	Operating Temperature	32° - 158°F (0° - 70°C)
	Current Consumption @ 3.3V	Less than 70 mA peak imaging and scrolling Less than 25 mA hardware finger detection Advanced Power Management
	High-Rate Image Capture	Up to 240 image frames /sec
	ESD Resistance	IEC 61000-4-2 Level 4 (±15KV)
	Detection Matrix	200 pixel wide fingerpring image 16.5 mm x 3 mm sensor area 508 dpi resolution, 256 levels of grayscale

Networking/communications

WWAN

Technical Specifications

	HP hs3110HSPA+ Mobile Broadband Module*
Technology/Operating bands	HSPA+: 2100 (Band1), 1900 (Band 2), 1700 (Band 4), 850 (Band 5), 900 (Band 8) MHz E-GPRS: 1900 (Band 2), 1800 (Band 3), 850 MHz (Band 5), 900 (Band 8) MHz
Wireless protocol standards	E-GPRS: Class B, Multi-slot class 33, coding schemes CS1 - CS4 and MSC1 - MSC9. UMTS/WCDMA: Release 99 and Release 7
GPS	Standalone, A-GPS
GPS bands	1575.42 MHz ± 1.023 MHz, GLONASS 1596-1607MHz
Maximum data rates	HSPA+: 21.6 Mbps (Download), 5.76 Mbps (Upload) HSPA: 7.2 Mbps (Download), 5.76 Mbps (Upload) WCDMA PS: 384 kbps (Download), 384 kbps (Upload) WCDMA CS: 64 kbps (Download), 64 kbps (Upload) E-GPRS: 296 kbps (Download), 236.8 kbps (Upload) GPRS: 107 kbps (Download), 85.6 kbps (Upload)
Maximum output power	HSPA+: 24 dBm E-GPRS 1800/1900: 26 dBm E-GPRS 850/900: 27 dBm GPRS 1800/1900: 30 dBm GPRS 850/900: 33 dBm
Maximum power consumption	2500 mA (peak); 600 mA (average)
Form Factor	M.2, 3042-S3 Key B
Weight	6 g
Dimensions (Length x Width x Thickness)	1.65 x 1.18 x 0.09 in (42 x 30 x 2.3 mm)

* Mobile Broadband is an optional feature. Connection requires wireless data service contract, network support, and is not available in all areas. Contact service provider to determine the coverage area and availability. Connection speeds will vary due to location, environment, network conditions, and other factors.

	HP It4110 LTE/HSPA+ 4G Mobile Broadband*
Technology/Operating bands	LTE: 1900 (Band 2) , 1700/2100 (Band 4), 850 (Band 5), 700 (Band 13), 700 (Band 17), 1900 (Band 25) MHz HSPA+: 2100 (Band 1), 1900 (Band 2) , AWS 1700/2100 (Band 4), 850 (Band 5), 800 (Band 8) MHz E-GPRS: 1900 (Band 2), 1800 (Band 3) , 850 (Band 5) , 900 (Band 8) MHz EV-DO: 800 (BC0), 1900 (BC1) MHz
Wireless protocol standards	3GPP Release 8 LTE Specification WCDMA R99, 3GPP Release 5, 6 and 7 UMTS Specification EVDO Release 0 and Release A
GPS	Standalone GPS, A-GPS, GPS XTRA
GPS bands	1575.42 MHz (± 1.023 MHz), GLONASS 1596-1607MHz
Maximum data rates	LTE (Category 3): 100 Mbps (Download), 50Mbps (Upload) DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload) HSPA+: 21.6 Mbps (Download), 5.76 Mbps (Upload) EDGE: 236.8 kbps (Download), 236.8 kbps (Upload) GPRS: 85.6 kbps(Download), 85.6 kbps (Upload)
Maximum output power	LTE: +23 dBm WCDMA: +23 dBm GSM 850/900, GMSK: +32dBm GSM 850/900, 8PSK: +27dBm DCS1800 / PCS 1900, GMSK: +29dBm

Technical Specifications

	DCS1800 / PCS 1900, 8PSK: +26dBm CDMA: +24dBm
Maximum power consumption	LTE: 1,200 mA (peak); 900 mA (average) WCDMA: 1,100 mA (peak); 800 mA (average) EGPRS: 2,500 mA (peak); 700 mA (average)
Form Factor	M.2, 3042-S3 Key B
Weight	6 g
Dimensions (Length x Width x Thickness)	1.65 x 1.18 x 0.09 in (42 x 30 x 2.3 mm)

* Mobile Broadband is an optional feature. Connection requires wireless data service contract, network support, and is not available in all areas. Contact service provider to determine the coverage area and availability. Connection speeds will vary d location, environment, network conditions, and other factors. 4G LTE not available on all products or in all countries.

WLAN

Intel® Dual Band Wireless-AC 8260 802.11a/b/g/n/ac (2x2) WiFi and Bluetooth® 4.2 Combo - TBD

Intel® Dual Band Wireless-AC 3160 802.11a/b/g/n/ac (1x1) WiFi and Bluetooth® 4.0 Combo	Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac
	Interoperability Frequency Band	Wi-Fi certified 802.11b/g/n <ul style="list-style-type: none"> • 2.402 - 2.482 GHz 802.11a/n <ul style="list-style-type: none"> • 4.9 - 4.95 GHz (Japan) • 5.15 - 5.25 GHz • 5.25 - 5.35 GHz • 5.47 - 5.725 GHz • 5.825 - 5.850 GHz
	Data Rates	<ul style="list-style-type: none"> • 2.402 - 2.482 GHz • 802.11b: 1, 2, 5.5, 11 Mbps • 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz) • 802.11ac : MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, and 80MHz)
	Modulation	Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM
	Security¹	<ul style="list-style-type: none"> • IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only • AES-CCMP: 128 bit in hardware • 802.1x authentication • WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. • WPA2 certification • IEEE 802.11i • Cisco Certified Extensions, all versions through CCX4 and CCX Lite • WAPI

Technical Specifications

Network Architecture	Ad-hoc (Peer to Peer)
Models	Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power²	<ul style="list-style-type: none"> • 2.4G: +13.5dBm minimum • 5G: +12dBm minimum • Maximum output power must be able to achieve modular regulatory certification with notebooks that have antennas >20cm from the user and peak gain of +3dBi at 2.4GHz and +4dBi at 5GHz
Power Consumption	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 250 mW (WLAN Associated) Idle mode: 100 mW (WLAN unassociated) Radio disabled: 75 mW
Power Management	ACPI and PCI Express compliant power management
Receiver Sensitivity³	802.11 compliant power saving mode 802.11b: -95 dBm (1 Mbps), -93 dBm (2 Mbps), -91 dBm (5.5 Mbps), -88 dBm (11 Mbps) 802.11a/g: -90 dBm (6 Mbps), -89 dBm (9 Mbps), -87 dBm (12 Mbps), -85 dBm (18 Mbps), -82 dBm (24 Mbps), -79 dBm (36 Mbps), -76 dBm (48 Mbps), -74 dBm (54 Mbps) 802.11n: -69 dBm (72.2 Mbps), -66 dBm (300 Mbps) 802.11ac: -83 dBm (65Mbps), -79 dBm (195Mbps), -73 dBm (390Mbps), -66 dBm (650Mbps), -60 dBm (867Mbps)
Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
Form Factor	PCI-Express Half-MiniCard
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)
Weight	3.1g
Operating Voltage	3.3v +/- 9%
Temperature	Operating 14° to 158° F (-10° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
Altitude	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
LED Activity	LED Amber - Radio OFF; LED White - Radio ON
	<ol style="list-style-type: none"> 1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
Bluetooth Specification	V4.0 High Speed, V2.1+EDR, backwards compatible with V1.1, 1.2 and 2.0

QuickSpecs

Technical Specifications

	Number of Available Channels	79 (1 MHz) available channels
	Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
	Transmit Power	-6 dBm to 4 dBm (Bluetooth Class II)
	Receiver Sensitivity	Better than -80 dBm at 0.1 % raw bit error rate
	Power Consumption	Peak (Tx) 330 mW Peak (Rx) 230 mW Sleep 17 mW
	Antenna	Internally integrated within module
	Range	Up to 33 ft (10 m)
	Electrical Interface	USB 2.0 compliant Microsoft Windows Plug and Play compliant
	Bluetooth Software Supported	Broadcom Bluetooth for Windows Microsoft Windows Bluetooth Software
	Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves
	Security	Full support of Bluetooth Security Provisions
	Power Management	Microsoft Windows ACPI, and USB Bus Support Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
	Certifications	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
	Bluetooth Profiles Supported	Generic Access Profile (GAP) Service Discovery Application Profile (SDAP) Serial Port Profile (SPP) Dial_Up Networking Profile (DUN) Generic Object Exchange Profile (GOEP) Object Push Profile (OPP) File Transfer Profile (FTP) Synchronization Profile (SYNC) Hard Copy Cable Replacement (HCRP) Personal Area Networking Profile (PAN) Human Interface Device Profile (HID) Generic Audio/Video Distribution Profile (GAVDP) Advanced Audio/Video Distribution Profile (A2DP) FAX Profile (FAX) Basic Imaging Profile (BIP) Headset Profile (HSP) Hands Free Profile (HFP) Basic Printing Profile (BPP) VDP (Video Distribution Profile) AVRCP (Audio Video Remote Control Profile)

Intel® Dual Band
Wireless-AC 3165
802.11a/b/g/n/ac (1x1)
WiFi and Bluetooth®
4.0 Combo

**Wireless LAN
Standards**

IEEE 802.11a
IEEE 802.11b
IEEE 802.11g
IEEE 802.11n
IEEE 802.11ac



Technical Specifications

Interoperability Frequency Band	Wi-Fi certified 802.11b/g/n <ul style="list-style-type: none">2.402 - 2.482 GHz Note: The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels. 802.11a/n <ul style="list-style-type: none">4.9 - 4.95 GHz (Japan)5.15 - 5.25 GHz5.25 - 5.35 GHz5.47 - 5.725 GHz5.825 - 5.850 GHz Note: Indonesia only supports 5.725 - 5.825 GHz (CH149 - CH161)
Data Rates	<ul style="list-style-type: none">802.11b: 1, 2, 5.5, 11 Mbps802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)802.11ac : MCS0 ~ MCS7, (1SS) (20MHz, 40MHz, and 80MHz)
Modulation	Direct Sequence Spread Spectrum
Security¹	BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM <ul style="list-style-type: none">IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode onlyAES-CCMP: 128 bit in hardware802.1x authenticationWPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.WPA2 certificationIEEE 802.11iCisco Certified Extensions, all versions through CCX4 and CCX LiteWAPI
Network Architecture Models Roaming Output Power²	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required) IEEE 802.11 compliant roaming between access points <ul style="list-style-type: none">802.11b : +16dBm minimum802.11g : +14dBm minimum802.11a : +14dBm minimum802.11n HT20(2.4GHz) : +13dBm minimum802.11n HT40(2.4GHz) : +13dBm minimum802.11n HT20(5GHz) : +12dBm minimum802.11n HT40(5GHz) : +12dBm minimum802.11ac 80MHz(5GHz) : +11dBm minimum
Power Consumption	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 60 mW (WLAN unassociated) Radio disabled: 30 mW
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Receiver Sensitivity³	802.11b, 1Mbps : -94dBm maximum

Technical Specifications

	802.11b, 11Mbps : -86dBm maximum
	802.11g, 6Mbps : -88dBm maximum
	802.11g, 54Mbps : -74dBm maximum
	802.11a, 6Mbps : -86dBm maximum
	802.11a, 54Mbps : -72dBm maximum
	802.11n, MCS07 : -69dBm maximum
	802.11n, MCS15 : -66dBm maximum
	802.11ac, 1SS, MCS-0 : -86dBm maximum
	802.11ac, 1SS, MCS-9 : -61dBm maximum
	802.11ac, 2SS, MCS-0 : -83dBm maximum
	802.11ac, 2SS, MCS-9 : -58dBm maximum
Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure
	Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
Form Factor	PCI-Express M.2 MiniCard
Dimensions	Type 2230 : 2.3 x 22.0 x 30.0 mm
	Or
	Type 1630 : 2.3 x 16.0 x 30.0 mm
Weight	Type 2230 : 2.8g
	Or
	Type 1630 : 2g
Operating Voltage	3.3v +/- 9%
Temperature	Operating 14° to 158° F (-10° to 70° C)
	Non-operating -40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% (non-condensing)
	Non-operating 5% to 95% (non-condensing)
Altitude	Operating 0 to 10,000 ft (3,048 m)
	Non-operating 0 to 50,000 ft (15,240 m)
LED Activity	LED Amber - Radio OFF; LED White - Radio ON
	4. Check latest software/driver release for updates on supported security features.
	5. Maximum output power may vary by country according to local regulations.
	6. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

HP Integrated Module with Bluetooth 4.0+EDR Wireless Technology

Bluetooth Specification	4.0+EDR Compliant														
Frequency Band	2402 to 2480 MHz														
Number of Available Channels	79 (1 MHz) available channels														
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps														
	Synchronous Connection Oriented links up to 3, 64 kbps, voice channels														
	Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric														
Transmit Power	The Bluetooth component shall operate as a Class II Bluetooth with a maximum transmit power of +4 dBm for BR and EDR.														
Receiver Sensitivity	<table border="1"> <thead> <tr> <th>Modulation</th> <th>0.01% BER</th> <th>0.001% BER</th> </tr> </thead> <tbody> <tr> <td>GFSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td>$\pi/4$-DQPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td>8DPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> </tbody> </table>			Modulation	0.01% BER	0.001% BER	GFSK	-80 dBm	-70 dBm	$\pi/4$ -DQPSK	-80 dBm	-70 dBm	8DPSK	-80 dBm	-70 dBm
Modulation	0.01% BER	0.001% BER													
GFSK	-80 dBm	-70 dBm													
$\pi/4$ -DQPSK	-80 dBm	-70 dBm													
8DPSK	-80 dBm	-70 dBm													
Power Consumption	Peak (Tx) 330 mW														
	Peak (Rx) 230 mW														
	Selective Suspend 17 mW														
Range	Up to 33 ft (10 m)														
Electrical Interface	USB 2.0 compliant														
Bluetooth Software Supported	Microsoft Windows Bluetooth Software														
Link Topology															

Technical Specifications

Electrical Interface	Point to Point, Multipoint Pico Nets up to 7 slaves
Bluetooth Software Supported Security	Full support of Bluetooth Security Provisions
Power Management	Microsoft Windows ACPI, and USB Bus Support
Power Management Certifications	Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
Security Certifications	All necessary regulatory approvals for supported countries, incl FCC (47 CFR) Part 15C, Section 15.247 & 15.249
Bluetooth Profiles Supported	
Power Management Certifications	ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark Serial Port Profile (SPP) ¹ Service Discovery Application Profile (SDAP) Dial-Up Networking (DUN) ^{1,2} Generic Object Exchange Profile (GOEP) ^{1,2} Object Push Profile (OPP) ^{1,2} File Transfer Profile (FTP) Synchronization Profile (SYNC)
Certifications	
Bluetooth Profiles Supported	Hard Copy Cable Replacement (HCRP) ^{1,2} Personal Area Networking Profile (PAN) ^{1,2} Human Interface Device Profile (HID) ^{1,2} FAX Profile (FAX) Basic Imaging Profile (BIP) ² Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)

Realtek 802.11 b/g/n (1x1)

Wireless LAN Standards	IEEE 802.11b IEEE 802.11g IEEE 802.11n
-------------------------------	--

Interoperability	Wi-Fi certified
-------------------------	-----------------

Frequency Band	802.11b/g/n
-----------------------	-------------

- 2.402 - 2.482 GHz

Note:

The FCC has declared as of September 1, 2014 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.

Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS 0 ~ MCS 07, (20MHz)
Modulation	Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM,

Security¹	<ul style="list-style-type: none"> • IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only • AES-CCMP: 128 bit in hardware
-----------------------------	--

Technical Specifications

	<ul style="list-style-type: none">• 802.1x authentication• WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.• WPA2 certification• IEEE 802.11i• Cisco Certified Extensions, all versions through CCX4 and CCX Lite• WAPI
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power²	<ul style="list-style-type: none">• 802.11b : +16dBm minimum• 802.11g : +14dBm minimum• 802.11a : +14dBm minimum• 802.11n HT20(2.4GHz) : +13dBm minimum• 802.11n HT40(2.4GHz) : +13dBm minimum• 802.11n HT20(5GHz) : +12dBm minimum• 802.11n HT40(5GHz) : +12dBm minimum
Power Consumption	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 60 mW (WLAN unassociated) Radio disabled: 30 mW
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Receiver Sensitivity³	802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum 802.11g, 54Mbps : -74dBm maximum 802.11a, 6Mbps : -86dBm maximum 802.11a, 54Mbps : -72dBm maximum 802.11n, MCS07 : -69dBm maximum 802.11n, MCS15 : -66dBm maximum
Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure

Technical Specifications

	Two embedded 2.4 GHz antennas are provided to the card to support WLAN and Bluetooth communications (Support Dual antenna or Single antenna, depend on platform requirement)
Form Factor	PCI-Express M.2 MiniCard
Dimensions	Type 2230 : 2.3 x 22.0 x 30.0 mm Or Type 1630 : 2.3 x 16.0 x 30.0 mm
Weight	Type 2230 : 2.8g Or Type 1630 : 2g
Operating Voltage	3.3v +/- 9%
Temperature	Operating Non-operating
Humidity	Operating Non-operating
Altitude	Operating Non-operating
LED Activity	LED Amber - Radio OFF; LED White - Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and packet error rate of 10% for 802.11a/g (OFDM modulation).

Realtek 802.11 b/g/n (1x1) + Bluetooth® Combo

Wireless LAN Standards	IEEE 802.11b IEEE 802.11g IEEE 802.11n
-------------------------------	--

Interoperability	Wi-Fi certified
-------------------------	-----------------

Frequency Band	802.11b/g/n <ul style="list-style-type: none">● 2.402 - 2.482 GHz
-----------------------	---

Note:

The FCC has declared as of September 1, 2014 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 otherwise disable those channels.

Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS 0 ~ MCS 07, (20MHz)
-------------------	---

Technical Specifications

Modulation	Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM,
Security¹	<ul style="list-style-type: none">• IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only• AES-CCMP: 128 bit in hardware• 802.1x authentication• WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.• WPA2 certification• IEEE 802.11i• Cisco Certified Extensions, all versions through CCX and CCX Lite• WAPI
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power²	<ul style="list-style-type: none">• 802.11b : +16dBm minimum• 802.11g : +14dBm minimum• 802.11n HT20(2.4GHz) : +13dBm minimum• 802.11n HT40(2.4GHz) : +13dBm minimum• 802.11n HT20(5GHz) : +12dBm minimum• 802.11n HT40(5GHz) : +12dBm minimum
Power Consumption	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 60 mW (WLAN unassociated) Radio disabled: 30 mW
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Receiver Sensitivity³	802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum 802.11g, 54Mbps : -74dBm maximum 802.11n, MCS07 : -69dBm maximum 802.11n, MCS15 : -66dBm maximum
Antenna type	High efficiency antenna with spatial diversity, mounted in the displ

Technical Specifications

	enclosure	
	Two embedded antennas for 2.4GHz are provided to the card to support WLAN and Bluetooth communications. (Support Dual antenna or Single antenna, depend on platform requirement)	
Form Factor	PCI-Express M.2 MiniCard	
Dimensions	Type 2230 : 2.3 x 22.0 x 30.0 mm Or Type 1630 : 2.3 x 16.0 x 30.0 mm	
Weight	Type 2230 : 2.8g Or Type 1630 : 2g	
Operating Voltage	3.3v +/- 9%	
Temperature	Operating 14° to 158° F (-10° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)	
Humidity	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)	
Altitude	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)	
LED Activity	LED Amber - Radio OFF; LED White - Radio ON	
	1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).	

HP Integrated Module with Bluetooth 4.0+EDR Wireless Technology

Bluetooth Specification	4.0+EDR Compliant
Frequency Band	2402 to 2480 MHz
Number of Available Channels	79 (1 MHz) available channels
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
Transmit Power	The Bluetooth component shall operate as a Class II Bluetooth with a maximum transmit power of +4 dBm for BR and EDR.

Technical Specifications

Receiver Sensitivity

Modulation	0.01% BER	0.001% BER
GFSK	-80 dBm	-70 dBm
$\pi/4$ -DQPSK	-80 dBm	-70 dBm
8DPSK	-80 dBm	-70 dBm

Power Consumption

Peak (Tx) 330 mW
Peak (Rx) 230 mW
Selective Suspend 17 mW

Range

Up to 33 ft (10 m)

Electrical Interface

USB 2.0 compliant

Bluetooth Software Supported

Microsoft Windows Bluetooth Software

Link Topology

Electrical Interface

Point to Point, Multipoint Pico Nets up to 7 slaves

Bluetooth Software Supported

Full support of Bluetooth Security Provisions

Security

Power Management

Microsoft Windows ACPI, and USB Bus Support

Power Management

Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff

Certifications

Security

All necessary regulatory approvals for supported countries, incl

Certifications

FCC (47 CFR) Part 15C, Section 15.247 & 15.249

Bluetooth Profiles Supported

Power Management

ETS 300 328, ETS 300 826

Certifications

Low Voltage Directive IEC950

UL, CSA, and CE Mark

Serial Port Profile (SPP)¹
Service Discovery Application Profile (SDAP)
Dial-Up Networking (DUN)^{1,2}
Generic Object Exchange Profile (GOEP)^{1,2}
Object Push Profile (OPP)^{1,2}
File Transfer Profile (FTP)
Synchronization Profile (SYNC)
Hard Copy Cable Replacement (HCRP)^{1,2}
Personal Area Networking Profile (PAN)^{1,2}
Human Interface Device Profile (HID)^{1,2}
FAX Profile (FAX)
Basic Imaging Profile (BIP)²
Headset Profile (HSP)
Hands Free Profile (HFP)
Advanced Audio Distribution Profile (A2DP)

Certifications

Bluetooth Profiles Supported

Broadcom 802.11 b/g/n (1x1) + Bluetooth® Combo



Technical Specifications

Wireless LAN Standards	IEEE 802.11b IEEE 802.11g IEEE 802.11n
Interoperability	Wi-Fi certified
Frequency Band	802.11b/g/n <ul style="list-style-type: none">• 2.402 - 2.482 GHz <p>Note: The FCC has declared as of September 1, 2014 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 otherwise disable those channels.</p>
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS 0 ~ MCS 07, (20MHz)
Modulation	Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM,
Security¹	<ul style="list-style-type: none">• IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only• AES-CCMP: 128 bit in hardware• 802.1x authentication• WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.• WPA2 certification• IEEE 802.11i• Cisco Certified Extensions, all versions through CCX and CCX Lite• WAPI
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power²	<ul style="list-style-type: none">• 802.11b : +16dBm minimum• 802.11g : +14dBm minimum• 802.11n HT20(2.4GHz) : +13dBm minimum• 802.11n HT40(2.4GHz) : +13dBm minimum• 802.11n HT20(5GHz) : +12dBm minimum• 802.11n HT40(5GHz) : +12dBm minimum

Technical Specifications

Power Consumption	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 60 mW (WLAN unassociated) Radio disabled: 30 mW
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Receiver Sensitivity³	802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum 802.11g, 54Mbps : -74dBm maximum 802.11n, MCS07 : -69dBm maximum 802.11n, MCS15 : -66dBm maximum
Antenna type	High efficiency antenna with spatial diversity, mounted in the displ enclosure Two embedded antennas for 2.4GHz are provided to the card to support WLAN and Bluetooth communications. (Support Dual antenna or Single antenna, depend on platform requirement)
Form Factor	PCI-Express M.2 MiniCard
Dimensions	Type 2230 : 2.3 x 22.0 x 30.0 mm Or Type 1630 : 2.3 x 16.0 x 30.0 mm
Weight	Type 2230 : 2.8g Or Type 1630 : 2g
Operating Voltage	3.3v +/- 9%
Temperature	Operating 14° to 158° F (-10° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
Altitude	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
LED Activity	LED Amber - Radio OFF; LED White - Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

HP Integrated Module with Bluetooth 4.0+EDR Wireless Technology



Technical Specifications

Bluetooth Specification	4.0+EDR Compliant												
Frequency Band	2402 to 2480 MHz												
Number of Available Channels	79 (1 MHz) available channels												
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric												
Transmit Power	The Bluetooth component shall operate as a Class II Bluetooth with a maximum transmit power of +4 dBm for BR and EDR.												
Receiver Sensitivity	<table border="1"> <thead> <tr> <th>Modulation</th> <th>0.01% BER</th> <th>0.001% BER</th> </tr> </thead> <tbody> <tr> <td>GFSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td>$\pi/4$-DQPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td>8DPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> </tbody> </table>	Modulation	0.01% BER	0.001% BER	GFSK	-80 dBm	-70 dBm	$\pi/4$ -DQPSK	-80 dBm	-70 dBm	8DPSK	-80 dBm	-70 dBm
Modulation	0.01% BER	0.001% BER											
GFSK	-80 dBm	-70 dBm											
$\pi/4$ -DQPSK	-80 dBm	-70 dBm											
8DPSK	-80 dBm	-70 dBm											
Power Consumption	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW												
Range	Up to 33 ft (10 m)												
Electrical Interface	USB 2.0 compliant												
Bluetooth Software Supported	Microsoft Windows Bluetooth Software												
Link Topology													
Electrical Interface	Point to Point, Multipoint Pico Nets up to 7 slaves												
Bluetooth Software Supported													
Security	Full support of Bluetooth Security Provisions												
Power Management	Microsoft Windows ACPI, and USB Bus Support												
Power Management													
Certifications	Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff												
Security	All necessary regulatory approvals for supported countries, including												
Certifications	FCC (47 CFR) Part 15C, Section 15.247 & 15.249												
Bluetooth Profiles Supported													
Power Management	ETS 300 328, ETS 300 826												
Certifications	Low Voltage Directive IEC950 UL, CSA, and CE Mark Serial Port Profile (SPP) ¹ Service Discovery Application Profile (SDAP)												

Technical Specifications

Certifications	Dial-Up Networking (DUN) ^{1,2} Generic Object Exchange Profile (GOEP) ^{1,2} Object Push Profile (OPP) ^{1,2} File Transfer Profile (FTP) Synchronization Profile (SYNC)
Bluetooth Profiles Supported	Hard Copy Cable Replacement (HCRP) ^{1,2} Personal Area Networking Profile (PAN) ^{1,2} Human Interface Device Profile (HID) ^{1,2} FAX Profile (FAX) Basic Imaging Profile (BIP) ² Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)

Broadcom 802.11a/b/g/n (2x2) and Bluetooth® 4.0 Combo

Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n
Interoperability	Wi-Fi certified
Frequency Band	802.11b/g/n <ul style="list-style-type: none"> • 2.402 - 2.482 GHz <p>Note: The FCC has declared as of January 1, 2015 products that use passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise do those channels.</p>
Antenna Structure	802.11a <ul style="list-style-type: none"> • 4.9 - 4.95 GHz (Japan) • 5.15 - 5.25 GHz • 5.25 - 5.35 GHz • 5.47 - 5.725 GHz • 5.825 - 5.850 GHz <p>Note: Indonesia only supports 5.725 - 5.825 GHz (CH149 - CH150)</p>
Data Rates	2 transmit; 2 receive (2x2) 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)
Modulation	Direct Sequence Spread Spectrum CCK, BPSK, QPSK, 16-QAM, 64-QAM
Security¹	<ul style="list-style-type: none"> • IEEE and WiFi compliant 64 / 128 bit WEP encryption for mode only • AES-CCMP: 128 bit in hardware • 802.1x authentication • WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and • WPA2 certification • IEEE 802.11i • Cisco Certified Extensions, all versions through CCX4 and Lite • WAPI

Technical Specifications

Sub-channels	Multinational support with frequency bands and channels compliant with local regulations.	
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)	
Roaming	IEEE 802.11 compliant roaming between band Access Points	
Output Power²	<ul style="list-style-type: none"> ● 802.11b : +16dBm minimum ● 802.11g : +14dBm minimum ● 802.11a : +14dBm minimum ● 802.11n HT20(2.4GHz) : +13dBm minimum ● 802.11n HT40(2.4GHz) : +13dBm minimum ● 802.11n HT20(5GHz) : +12dBm minimum ● 802.11n HT40(5GHz) : +12dBm minimum 	
Power Consumption	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 60 mW (WLAN unassociated) Radio disabled: 30 mW	
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity³	802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum 802.11g, 54Mbps : -74dBm maximum 802.11a, 6Mbps : -86dBm maximum 802.11a, 54Mbps : -72dBm maximum 802.11n, MCS07 : -69dBm maximum 802.11n, MCS15 : -66dBm maximum	
Antenna type	High efficiency antenna with spatial diversity, mounted in the device enclosure Two embedded dual band 2.4/5 GHz antennas are provided to support WLAN MIMO and Bluetooth communications	
Form Factor	PCI-Express M.2 MiniCard	
Dimensions	Type 2230 : 2.3 x 22.0 x 30.0 mm Or Type 1630 : 2.3 x 16.0 x 30.0 mm	
Weight	Type 2230 : 2.8g Or Type 1630 : 2g	
Operating Voltage	3.3v +/- 9%	
Temperature	Operating	14° to 158° F (-10° to 70° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
LED Activity	LED Amber - Radio OFF; LED White - Radio ON	
	1. Check latest software/driver release for updates on supported security features.	
	2. Maximum output power may vary by country according to local regulations.	
	3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).	

Technical Specifications

HP Integrated Module with Bluetooth 4.0+EDR Wireless Technology

Bluetooth Specification	4.0+EDR Compliant
Frequency Band	2402 to 2480 MHz
Number of Available Channels	79 (1 MHz) available channels
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
Transmit Power	The Bluetooth component shall operate as a Class II Bluetooth (C2) with a maximum transmit power of +4 dBm for BR and EDR.

Receiver Sensitivity	<table border="1"> <thead> <tr> <th>Modulation</th> <th>0.01% BER</th> <th>0.001% BER</th> </tr> </thead> <tbody> <tr> <td>GFSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td>$\pi/4$-DQPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td>8DPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> </tbody> </table>	Modulation	0.01% BER	0.001% BER	GFSK	-80 dBm	-70 dBm	$\pi/4$ -DQPSK	-80 dBm	-70 dBm	8DPSK	-80 dBm	-70 dBm
Modulation	0.01% BER	0.001% BER											
GFSK	-80 dBm	-70 dBm											
$\pi/4$ -DQPSK	-80 dBm	-70 dBm											
8DPSK	-80 dBm	-70 dBm											

Power Consumption	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW
Range	Up to 33 ft (10 m)
Electrical Interface	USB 2.0 compliant
Bluetooth Software Supported	Microsoft Windows Bluetooth Software
Link Topology	
Electrical Interface	Point to Point, Multipoint Pico Nets up to 7 slaves
Bluetooth Software Supported	Full support of Bluetooth Security Provisions
Security	
Power Management	Microsoft Windows ACPI, and USB Bus Support
Power Management	Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
Certifications	All necessary regulatory approvals for supported countries, including FCC (47 CFR) Part 15C, Section 15.247 & 15.249
Security	
Certifications	
Bluetooth Profiles Supported	
Power Management	ETS 300 328, ETS 300 826
Certifications	Low Voltage Directive IEC950 UL, CSA, and CE Mark Serial Port Profile (SPP) ¹ Service Discovery Application Profile (SDAP) Dial-Up Networking (DUN) ^{1,2} Generic Object Exchange Profile (GOEP) ^{1,2} Object Push Profile (OPP) ^{1,2} File Transfer Profile (FTP) Synchronization Profile (SYNC)
Certifications	
Bluetooth Profiles Supported	Hard Copy Cable Replacement (HCRP) ^{1,2} Personal Area Networking Profile (PAN) ^{1,2} Human Interface Device Profile (HID) ^{1,2} FAX Profile (FAX) Basic Imaging Profile (BIP) ² Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)

Technical Specifications

Realtek Ethernet (10/100/1000)	Ethernet Features	<p>10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14)</p> <p>100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30)</p> <p>1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 8023 clauses 40)</p> <p>Auto-Negotiation (Automatic Speed Selection)</p> <p>Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s</p> <p>IEEE 802.1p QoS (Quality of Service) Support</p> <p>IEEE 802.1q VLAN support</p> <p>IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)</p> <p>IEEE 802.3az EEE (Energy Efficient Ethernet)</p> <p>Jumbo Frame 9K</p> <p>Auto MDI/MDIX Crossover cable detection</p>
	Power Management	<p>ACPI compliant - multiple power modes</p> <p>Situation-sensitive features reduce power consumption</p> <p>Advanced link down power saving for reducing link down power consumption</p>
	Performance Features	<p>TCP/IP/UDP Checksum Offload (configurable)</p> <p>Protocol Offload (ARP & NS)</p> <p>Large send offload and Giant send offload</p> <p>Receiving Side Scaling</p>
	Manageability	<p>Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only)</p> <p>PXE 2.1 Remote Boot</p> <p>Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30))</p> <p>Comprehensive diagnostic and configuration software suite</p> <p>Virtual Cable Doctor for Ethernet cable status</p>
	Interface NIC Device Driver Name	<p>PCI Express 1.1 to fully support ASPM L0s/L1 and CLKREQ</p> <p>Realtek PCIe GBE Ethernet Family Controller</p>

Audio/Multimedia

DTS Studio Sound

Hardware	Implementation	Conexant
	Function Key Volume Controls	Volume up, volume down, and mute
	Full Duplex	Yes
	Microphone In	Stereo
	Headphone/Line Out	Stereo
	Integrated Microphone	Yes, dual digital microphone array

Technical Specifications

Audio Output Quality	Frequency Response	20Hz - 20kHz
	Signal to Noise Ratio	106 dB (DAC), 102dB (ADC)
	Total Harmonic Distortion	91dB THD+n on Line Out/HP (0.003%)
	Play Sampling Rate(s)	Up to 192kHz
	Record Sampling Rate(s)	Up to 96Khz
	DAC	16, 20 or 24-bit
	ADC	16, 20 or 24-bit
Integrated Stereo Speakers	Power Rating	2 Watts
	Impedance	4 Ohms

Power

HP 45W Smart AC Adapter	Dimensions	3.74 x 1.57 x 1.04 in (9.5 x 4.0 x 2.65 cm)		
	Weight	0.386 lb (175g) max		
	Input	Input	90 to 265 VAC	
		Input Efficiency	87.74% at 115Vac and 88.4% at 230Vac	
	Output	Input frequency range	47 to 63 Hz	
		Input AC current	1.4 A at 90 VAC	
		Output power	45W	
		DC output	19.5V	
		Hold-up time	5 msec at 115 VAC input	
		Output current limit	<8.0A	
		Over voltage protection	< 29V max automatic shutdown	
		Over short protection	Auto-recovery and no damage	
		Connector	3 pin/grounded, mates with interchangeable cords	
		Environmental Design	Operating temperature	32° to 95° F (0° to 35° C)
	Non-operating (storage) temperature		-4° to 185° F (-20° to 85° C)	
Altitude	0 to 16,400 ft (0 to 5,000 m)			
Humidity	20% to 95%			
Storage Humidity	10% to 95%			

Technical Specifications

	EMI and Safety Certifications	<p>*CE Mark - full compliance with LVD and EMC directives</p> <p>* Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE.</p> <p>* MTBF - over 200,000 hours at 25°C ambient condition.</p>	
HP 65W EM Smart AC Adapter (PRC, India only)	Dimensions	4.98 x 1.97 x 1.18 in (12.65 x 5.0 x 3.0 cm)	
	Weight	0.62 lb (290g) max	
	Input	90 to 265 VAC	
		Input Efficiency	87% min at 115 VAC
		Input frequency range	47 to 63 Hz
		Input AC current	1.7 A at 90 VAC
	Output	Output power	65W
		DC output	19.5V
		Hold-up time	5 msec at 115 VAC input
		Output current limit	<11.0A
		Over voltage protection	< 29V max automatic shutdown
		Over short protection	Auto-recovery and no damage
	Connector	3 pin/grounded, mates with interchangeable cords	
	Environmental Design	Operating temperature	32° to 95° F (0° to 35° C)
	Non-operating (storage) temperature	-4° to 185° F (-20° to 85° C)	
	Altitude	0 to 16,400 ft (0 to 5,000 m)	
	Humidity	20% to 95%	
	Storage Humidity	10% to 95%	
	EMI and Safety Certifications	<p>*CE Mark - full compliance with LVD and EMC directives</p> <p>* Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE.</p> <p>* MTBF - over 200,000 hours at 25°C ambient condition.</p>	
HP 65W Smart AC Adapter	Dimensions	4.98 x 1.97 x 1.18 in (12.65 x 5.0 x 3.0 cm)	
	Weight	0.62 lb (290g) max	
	Input	90 to 265 VAC	
		Input Efficiency	87% min at 115 VAC
		Input frequency range	47 to 63 Hz
		Input AC current	1.7 A at 90 VAC
	Output	Output power	65W
		DC output	19.5V
		Hold-up time	5 msec at 115 VAC input
		Output current limit	<11.0A
		Over voltage protection	< 29V max automatic shutdown
		Over short protection	Auto-recovery and no damage
	Connector	3 pin/grounded, mates with interchangeable cords	
	Environmental Design	Operating temperature	32° to 95° F (0° to 35° C)
	Non-operating (storage) temperature	-4° to 185° F (-20° to 85° C)	
	Altitude	0 to 16,400 ft (0 to 5,000 m)	
	Humidity	20% to 95%	

Technical Specifications

EMI and Safety Certifications

Storage Humidity 10% to 95%
 *CE Mark - full compliance with LVD and EMC directives
 * Worldwide safety standards - IEC60950, EN60950, UL60950,
 Class1, SELV; Agency approvals - C-UL-US, NORDICS,
 DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B,
 CCC, NOM-1 NYCE.
 * MTBF - over 200,000 hours at 25°C ambient condition.

Battery 430/440 G3

HP 4-cell, Long Life 44 WHr Li-ion

Dimensions (H x W x L)	34.96x277.2x21.63 mm (1.38x10.91x0.85 inch)	
Weight	0.32 kg (0.72lb)	
Cells/Type	4cell Lithium-Ion	
Energy	Voltage	14.8V
	Amp-hour capacity	3.0Ah
	Watt-hour capacity	44Wh
Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
	Operating (Discharging)	14° to 122° F (-10° to 60° C)
	Non-operating	-4° to 122° F (-20° to 60° C)
Battery Re-Charge Time	System in OFF or Standby Mode	<3 hours
Fuel Gauge LED	No	
Warranty	1 year	
Optional Travel Battery Available	No	

HP 6-cell, Long Life 55 WHr Li-ion. Dimensions (H x W x L) 35.31x49.59x277.2

Weight	340g	
Cells/Type	Cylindrical ICR18650 C4	
Energy	Voltage	10.68V
	Amp-hour capacity	5.15Ah
	Watt-hour capacity	55Wh
Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
	Operating (Discharging)	14 to 140° F (-10° to 60° C)
	Non-operating	-4° to 140° F (-20° to 60° C)
Battery Re-Charge Time	System in OFF or Standby Mode	3 hours
	System ON	3 to 5 hours
Fuel Gauge LED	NA	
Warranty	3years or 1000 cycles	
Optional Travel Battery Available	NA	

QuickSpecs

HP ProBook 430 G3 Notebook PC, HP ProBook
440 G3 Notebook PC, HP ProBook 450 G3
Notebook PC, , HP ProBook 470 G3 Notebook PC

Technical Specifications

450/470 G3

HP 4-cell, Long Life 44 WHr Li-ion	Dimensions (H x W x L)	33.40*275.80*20.60 mm (1.32x10.86x0.81 inch)
	Weight	0.3 kg (0.66lb)
	Cells/Type	4cell Lithium-Ion
	Energy	Voltage 14.8V Amp-hour capacity 3.0Ah Watt-hour capacity 44Wh
	Temperature	Operating (Charging) 32° to 113° F (0° to 45° C) Operating (Discharging) 14° to 122° F (-10° to 60° C) Non-operating -4° to 122° F (-20° to 60° C)
	Battery Re-Charge Time	System in OFF or Standby Mode <3 hours
	Fuel Gauge LED	No
	Warranty	1 year
	Optional Travel Battery Available	No

HP 6-cell, Long Life 55 WHr Li-ion	Dimensions (H x W x L)	45.59x275.8x33.89	
	Weight	330g	
	Cells/Type	Cylindrical ICR18650 C4	
	Energy	10.68V 5.15Ah 55Wh	Voltage Amp-hour capacity Watt-hour capacity
	Temperature	32° to 113° F (0° to 45° C) 14 to 140° F (-10° to 60° C) -4° to 140° F (-20° to 60° C)	Operating (Charging) Operating (Discharging) Non-operating
	Battery Re-Charge Time	3 hours 3 to 5 hours	System in OFF or Standby Mode System ON
	Fuel Gauge LED	NA	
	Warranty	3years or 1000 cycles	
	Optional Travel Battery Available	N0	

ENVIRONMENTAL

TBD

Country of Origin

China



Technical Specifications

ENVIRONMENTAL

HP ProBook 430 G3 Notebook PC

Eco-Label Certifications & declarations	<p>This product has received or is in the process of being certified to the following approvals and may</p> <ul style="list-style-type: none"> • IT ECO declaration • US ENERGY STAR® • EPEAT <Gold> registered in the United States. See http://www.epeat.net for registration st 										
System Configuration Energy Consumption (in accordance with US ENERGY STAR® test method)	<p>The configuration used for the Energy Consumption and Declared Noise Emissions data for the N</p> <table border="1" data-bbox="373 593 1519 918"> <thead> <tr> <th></th> <th style="text-align: center;">115VAC, 60Hz</th> </tr> </thead> <tbody> <tr> <td>Normal Operation (Short idle)</td> <td style="text-align: center;">6.66 W</td> </tr> <tr> <td>Normal Operation (Long idle)</td> <td style="text-align: center;">3.72 W</td> </tr> <tr> <td>Sleep</td> <td style="text-align: center;">0.64 W</td> </tr> <tr> <td>Off</td> <td style="text-align: center;">0.32 W</td> </tr> </tbody> </table> <p>Note: Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the mo Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a mode typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsof</p>		115VAC, 60Hz	Normal Operation (Short idle)	6.66 W	Normal Operation (Long idle)	3.72 W	Sleep	0.64 W	Off	0.32 W
	115VAC, 60Hz										
Normal Operation (Short idle)	6.66 W										
Normal Operation (Long idle)	3.72 W										
Sleep	0.64 W										
Off	0.32 W										
Heat Dissipation*	<table border="1" data-bbox="373 1070 1519 1317"> <thead> <tr> <th></th> <th style="text-align: center;">115VAC, 60Hz</th> </tr> </thead> <tbody> <tr> <td>Normal Operation (Short idle)</td> <td style="text-align: center;">23 BTU/hr</td> </tr> <tr> <td>Normal Operation (Long idle)</td> <td style="text-align: center;">13 BTU/hr</td> </tr> <tr> <td>Sleep</td> <td style="text-align: center;">2 BTU/hr</td> </tr> <tr> <td>Off</td> <td style="text-align: center;">1 BTU/hr</td> </tr> </tbody> </table> <p>*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is</p>		115VAC, 60Hz	Normal Operation (Short idle)	23 BTU/hr	Normal Operation (Long idle)	13 BTU/hr	Sleep	2 BTU/hr	Off	1 BTU/hr
	115VAC, 60Hz										
Normal Operation (Short idle)	23 BTU/hr										
Normal Operation (Long idle)	13 BTU/hr										
Sleep	2 BTU/hr										
Off	1 BTU/hr										
Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)	<table border="1" data-bbox="373 1317 1519 1675"> <thead> <tr> <th></th> <th style="text-align: center;">Sound Power (L_{WAd}, bels)</th> </tr> </thead> <tbody> <tr> <td>Typically Configured - Idle</td> <td style="text-align: center;">2.9</td> </tr> <tr> <td>Fixed Disk - Random writes</td> <td style="text-align: center;">3.0</td> </tr> </tbody> </table>		Sound Power (L _{WAd} , bels)	Typically Configured - Idle	2.9	Fixed Disk - Random writes	3.0				
	Sound Power (L _{WAd} , bels)										
Typically Configured - Idle	2.9										
Fixed Disk - Random writes	3.0										
Longevity and Upgrading	<p>This product can be upgraded, possibly extending its useful life by several years. Upgradeable fe</p> <ul style="list-style-type: none"> 3 USB ports 1 PC card slot (type I/II) 1 ExpressCard/54 slot 1 IEEE 1394 Port 2 SODIMM memory slots 										



Technical Specifications

	<p>Optional expansion base docking station</p> <p>1 multi-bay II storage port</p> <p>Interchangeable HDD??</p> <p><edit list of features as required></p> <p>Spare parts are available throughout the warranty period and or for up to "5" years after the end c</p>												
<p>Batteries</p>	<p>This battery(s) in this product comply with EU Directive 2006/66/EC</p> <p>Batteries used in the product do not contain:</p> <ul style="list-style-type: none"> Mercury greater the 1ppm by weight Cadmium greater than 20ppm by weight <p>Battery size: CR2032 (coin cell)</p> <p>Battery type: Lithium</p> <p>Battery size: 6-cell high capacity Lithium-Ion battery (optional 8 cell available)</p> <p>Battery type:</p>												
<p>Additional Information</p>	<p>This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive</p> <p>This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) directive</p> <p>This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water Act)</p> <p>This product is in compliance with the IEEE 1680 (EPEAT) standard at the <gold> level, see http://www.epeat.org/</p> <p>Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO 14726</p> <p>This product contains 0% post-consumer recycled plastic (by wt.)</p> <p>This product is 95.6% recycle-able when properly disposed of at end of life.</p>												
<p>Packaging Materials</p>	<table border="1"> <tr> <td data-bbox="357 1709 871 1753">External:</td> <td data-bbox="871 1709 1519 1753">PAPER/Corrugated</td> </tr> <tr> <td data-bbox="357 1753 871 1798">Internal:</td> <td data-bbox="871 1753 1519 1798">PLASTIC/EPE (Expanded Polyethylene)</td> </tr> <tr> <td data-bbox="357 1798 871 1832"></td> <td data-bbox="871 1798 1519 1832">PLASTIC/Polyethylene low density</td> </tr> <tr> <td colspan="2" data-bbox="357 1832 1519 1865">The PAPER/Corrugated packaging material is made from 80 % recycled content.</td> </tr> <tr> <td colspan="2" data-bbox="357 1865 1519 1899">The PLASTIC/EPE (Expanded Polyethylene) packaging materials contains at least 0% recycled content</td> </tr> <tr> <td colspan="2" data-bbox="357 1899 1519 1917">The PLASTIC/Polyethylene low density packaging materials contains at least 0% recycled content</td> </tr> </table>	External:	PAPER/Corrugated	Internal:	PLASTIC/EPE (Expanded Polyethylene)		PLASTIC/Polyethylene low density	The PAPER/Corrugated packaging material is made from 80 % recycled content.		The PLASTIC/EPE (Expanded Polyethylene) packaging materials contains at least 0% recycled content		The PLASTIC/Polyethylene low density packaging materials contains at least 0% recycled content	
External:	PAPER/Corrugated												
Internal:	PLASTIC/EPE (Expanded Polyethylene)												
	PLASTIC/Polyethylene low density												
The PAPER/Corrugated packaging material is made from 80 % recycled content.													
The PLASTIC/EPE (Expanded Polyethylene) packaging materials contains at least 0% recycled content													
The PLASTIC/Polyethylene low density packaging materials contains at least 0% recycled content													
<p>Material Usage</p>	<p>This product does not contain any of the following substances in excess of regulatory limits (refer http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf):</p> <ul style="list-style-type: none"> ● Asbestos 												

Technical Specifications

	<ul style="list-style-type: none"> ● Certain Azo Colorants ● Certain Brominated Flame Retardants - may not be used as flame retardants in plastics ● Cadmium ● Chlorinated Hydrocarbons ● Chlorinated Paraffins ● Formaldehyde ● Halogenated Diphenyl Methanes ● Lead carbonates and sulfates ● Lead and Lead compounds ● Mercuric Oxide Batteries ● Nickel - finishes must not be used on the external surface designed to be frequently handled ● Ozone Depleting Substances ● Polybrominated Biphenyls (PBBs) ● Polybrominated Biphenyl Ethers (PBBEs) ● Polybrominated Biphenyl Oxides (PBBOs) ● Polychlorinated Biphenyl (PCB) ● Polychlorinated Terphenyls (PCT) ● Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been ● Radioactive Substances ● Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
Packaging Usage	<p>HP follows these guidelines to decrease the environmental impact of product packaging:</p> <ul style="list-style-type: none"> ● Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials. ● Eliminate the use of ozone-depleting substances (ODS) in packaging materials. ● Design packaging materials for ease of disassembly. ● Maximize the use of post-consumer recycled content materials in packaging materials. ● Use readily recyclable packaging materials such as paper and corrugated materials. ● Reduce size and weight of packages to improve transportation fuel efficiency. ● Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.
End-of-life Management and Recycling	<p>Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of.</p> <p>The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/recycling facilities as well as HP OEM customers who integrate and re-sell HP equipment.</p>
Hewlett-Packard Corporate Environmental Information	<p>For more information about HP's commitment to the environment:</p> <p>Global Citizenship Report</p> <p>http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html</p> <p>Eco-label certifications</p> <p>http://www8.hp.com/us/en/hp-information/environment/ecolabels.html</p> <p>ISO 14001 certificates:</p> <p>http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/PC_GBU_Product_Design_ISO_14K_Certificate.pdf and</p>

Technical Specifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf>

HP ProBook 440 G3 Notebook PC

TBD

HP ProBook 450 G3 Notebook PC

Eco-Label Certifications & declarations	<p>This product has received or is in the process of being certified to the following approvals and may be certified to the following:</p> <ul style="list-style-type: none"> IT ECO declaration <p>US ENERGY STAR®</p> <ul style="list-style-type: none"> EPEAT <Gold> registered in the United States. See http://www.epeat.net for registration status.
System Configuration Energy Consumption (in accordance with US ENERGY STAR® test method)	<p>The configuration used for the Energy Consumption and Declared Noise Emissions data for the Notebook PC is:</p> <p style="text-align: center;">115VAC, 60Hz</p>
Normal Operation (Short idle)	<p style="text-align: center;">5.58 W</p>
Normal Operation (Long idle)	<p style="text-align: center;">3.51 W</p>
Sleep	<p style="text-align: center;">0.82 W</p>
Off	<p style="text-align: center;">0.39 W</p>
	<p>Note: Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the mode of operation specified in the Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model is configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.</p>
Heat Dissipation*	<p style="text-align: center;">115VAC, 60Hz</p>
Normal Operation (Short idle)	<p style="text-align: center;">19 BTU/hr</p>
Normal Operation (Long idle)	<p style="text-align: center;">12 BTU/hr</p>
Sleep	<p style="text-align: center;">3 BTU/hr</p>
Off	<p style="text-align: center;">1 BTU/hr</p>
	<p>*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is a typical office environment.</p>
Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)	<p style="text-align: center;">Sound Power (L_{WA}d, bels)</p>
Typically Configured - Idle	<p style="text-align: center;">2.8</p>
Fixed Disk - Random writes	<p style="text-align: center;">2.7</p>
Longevity and Upgrading	<p>This product can be upgraded, possibly extending its useful life by several years. Upgradeable features include:</p>

Technical Specifications

	<p>3 USB ports</p> <p>1 PC card slot (type I/II)</p> <p>1 ExpressCard/54 slot</p> <p>1 IEEE 1394 Port</p> <p>2 SODIMM memory slots</p> <p>Optional expansion base docking station</p> <p>1 multi-bay II storage port</p> <p>Interchangeable HDD??</p> <p><edit list of features as required></p> <p>Spare parts are available throughout the warranty period and or for up to "5" years after the end of pr</p>		
<p>Batteries</p>	<p>This battery(s) in this product comply with EU Directive 2006/66/EC</p> <p>Batteries used in the product do not contain:</p> <ul style="list-style-type: none"> Mercury greater the 1ppm by weight Cadmium greater than 20ppm by weight <p>Battery size: CR2032 (coin cell)</p> <p>Battery type: Lithium</p> <p>Battery size: 6-cell high capacity Lithium-Ion battery (optional 8 cell available)</p> <p>Battery type:</p>		
<p>Additional Information</p>	<p>This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive -</p> <p>This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WE</p> <p>This product is in compliance with California Proposition 65 (State of California; Safe Drinking W</p> <p>This product is in compliance with the IEEE 1680 (EPEAT) standard at the <gold> level, see ww</p> <p>Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO10.</p> <p>This product contains 0% post-consumer recycled plastic (by wt.)</p> <p>This product is 90.1% recycle-able when properly disposed of at end of life.</p>		
<p>Packaging Materials</p>	<table border="1"> <tr> <td data-bbox="333 1984 675 2040"> <p>External:</p> </td> <td data-bbox="675 1984 1509 2040"> <p>PAPER/Corrugated</p> </td> </tr> </table>	<p>External:</p>	<p>PAPER/Corrugated</p>
<p>External:</p>	<p>PAPER/Corrugated</p>		

Technical Specifications

	Internal:	PLASTIC/EPE (Expanded Polyethylene)
		PLASTIC/Polyethylene low density
	The PAPER/Corrugated packaging material is made from 80 % recycled content.	
	The PLASTIC/EPE (Expanded Polyethylene) packaging materials contains at least 0% recycled content.	
Material Usage	<p>This product does not contain any of the following substances in excess of regulatory limits (refer to http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf):</p> <ul style="list-style-type: none"> ● Asbestos ● Certain Azo Colorants ● Certain Brominated Flame Retardants - may not be used as flame retardants in plastics ● Cadmium ● Chlorinated Hydrocarbons ● Chlorinated Paraffins ● Formaldehyde ● Halogenated Diphenyl Methanes ● Lead carbonates and sulfates ● Lead and Lead compounds ● Mercuric Oxide Batteries ● Nickel - finishes must not be used on the external surface designed to be frequently handled ● Ozone Depleting Substances ● Polybrominated Biphenyls (PBBs) ● Polybrominated Biphenyl Ethers (PBBEs) ● Polybrominated Biphenyl Oxides (PBBOs) ● Polychlorinated Biphenyl (PCB) ● Polychlorinated Terphenyls (PCT) ● Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been ● Radioactive Substances ● Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO) 	
Packaging Usage	<p>HP follows these guidelines to decrease the environmental impact of product packaging:</p> <ul style="list-style-type: none"> ● Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging ● Eliminate the use of ozone-depleting substances (ODS) in packaging materials. ● Design packaging materials for ease of disassembly. ● Maximize the use of post-consumer recycled content materials in packaging materials. ● Use readily recyclable packaging materials such as paper and corrugated materials. ● Reduce size and weight of packages to improve transportation fuel efficiency. ● Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards. 	
End-of-life Management and Recycling	<p>Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. For more information, visit http://www.hp.com/go/reuse-recycle or contact your nearest HP sales office. Products returned to HP in the following manner:</p> <p>The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com or other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.</p>	
Hewlett-Packard Corporate Environmental Information	<p>For more information about HP's commitment to the environment:</p> <p style="text-align: center;">Global Citizenship Report</p>	

Technical Specifications

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www8.hp.com/us/en/hp-information/environment/ecolabels.html>

ISO 14001 certificates:

http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/PC_GBU_Product_Design_ISO_14K_Certificate.pdf

and

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf>

HP ProBook 470 G3 Notebook PC

Eco-Label Certifications & declarations	This product has received or is in the process of being certified to the following approvals and r <ul style="list-style-type: none"> • IT ECO declaration • US ENERGY STAR® • EPEAT <Gold> registered in the United States. See http://www.epeat.net for registration 	
System Configuration	The configuration used for the Energy Consumption and Declared Noise Emissions data for the	
Energy Consumption (in accordance with US ENERGY STAR® test method)	115VAC, 60Hz	230VAC, 50Hz
Normal Operation (Short idle)	7.58 W	7.82 W
Normal Operation (Long idle)	6.58 W	6.76 W
Sleep	0.69 W	0.75 W
Off	0.39 W	0.45 W
	Note: Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a m typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Micro	
Heat Dissipation*	115VAC, 60Hz	230VAC, 50Hz
Normal Operation (Short idle)	26 BTU/hr	27 BTU/hr
Normal Operation (Long idle)	23 BTU/hr	23 BTU/hr
Sleep	2 BTU/hr	3 BTU/hr
Off	1 BTU/hr	2 BTU/hr
	*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service lev	
Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)	Sound Power (L _{WAd} , bels)	
Typically Configured - Idle	3.2	
Fixed Disk - Random writes	3.0	
Longevity and Upgrading	This product can be upgraded, possibly extending its useful life by several years. Upgradeable <p>3 USB ports</p>	



Technical Specifications

	<p>1 PC card slot (type I/II)</p> <p>1 ExpressCard/54 slot</p> <p>1 IEEE 1394 Port</p> <p>2 SODIMM memory slots</p> <p>Optional expansion base docking station</p> <p>1 multi-bay II storage port</p> <p>Interchangeable HDD??</p> <p><edit list of features as required></p> <p>Spare parts are available throughout the warranty period and or for up to"5" years after the en</p>		
<p>Batteries</p>	<p>This battery(s) in this product comply with EU Directive 2006/66/EC</p> <p>Batteries used in the product do not contain:</p> <ul style="list-style-type: none"> Mercury greater the1ppm by weight Cadmium greater than 20ppm by weight <p>Battery size: CR2032 (coin cell)</p> <p>Battery type: Lithium</p> <p>Battery size: 6-cell high capacity Lithium-Ion battery (optional 8 cell available)</p> <p>Battery type:</p>		
<p>Additional Information</p>	<p>This product is in compliance with the Restrictions of Hazardous Substances (RoHS) direc</p> <p>This HP product is designed to comply with the Waste Electrical and Electronic Equipmer</p> <p>This product is in compliance with California Proposition 65 (State of California; Safe Drink</p> <p>This product is in compliance with the IEEE 1680 (EPEAT) standard at the <gold> level, s</p> <p>Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and I</p> <p>This product contains 0% post-consumer recycled plastic (by wt.)</p> <p>This product is 90.1% recycle-able when properly disposed of at end of life.</p>		
<p>Packaging Materials</p>	<table border="1"> <tr> <td data-bbox="396 1937 953 1977"> <p>External:</p> </td> <td data-bbox="953 1937 1519 1977"> <p>PAPER/Corrugated</p> </td> </tr> </table>	<p>External:</p>	<p>PAPER/Corrugated</p>
<p>External:</p>	<p>PAPER/Corrugated</p>		

Technical Specifications

	Internal:	PLASTIC/EPE (Expanded Polyethylene) PLASTIC/Polyethylene low density The PAPER/Corrugated packaging material is made from 80 % recycled content. The PLASTIC/EPE (Expanded Polyethylene) packaging materials contains at least 0% recycled content. The PLASTIC/Polyethylene low density packaging materials contains at least 0% recycled content.
Material Usage	<p>This product does not contain any of the following substances in excess of regulatory limits (refer http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf):</p> <ul style="list-style-type: none"> ● Asbestos ● Certain Azo Colorants ● Certain Brominated Flame Retardants - may not be used as flame retardants in plastics ● Cadmium ● Chlorinated Hydrocarbons ● Chlorinated Paraffins ● Formaldehyde ● Halogenated Diphenyl Methanes ● Lead carbonates and sulfates ● Lead and Lead compounds ● Mercuric Oxide Batteries ● Nickel - finishes must not be used on the external surface designed to be frequently handled ● Ozone Depleting Substances ● Polybrominated Biphenyls (PBBs) ● Polybrominated Biphenyl Ethers (PBBEs) ● Polybrominated Biphenyl Oxides (PBBOs) ● Polychlorinated Biphenyl (PCB) ● Polychlorinated Terphenyls (PCT) ● Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has limited use ● Radioactive Substances ● Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO) 	
Packaging Usage	<p>HP follows these guidelines to decrease the environmental impact of product packaging:</p> <ul style="list-style-type: none"> ● Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials. ● Eliminate the use of ozone-depleting substances (ODS) in packaging materials. ● Design packaging materials for ease of disassembly. ● Maximize the use of post-consumer recycled content materials in packaging materials. ● Use readily recyclable packaging materials such as paper and corrugated materials. ● Reduce size and weight of packages to improve transportation fuel efficiency. ● Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standard. 	
End-of-life Management and Recycling	<p>Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographical sales offices. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p> <p>The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information on the Hewlett Packard web site at: http://www.hp.com/go/recyclers. These instructions may apply to all HP equipment.</p>	
Hewlett-Packard Corporate Environmental Information	<p>For more information about HP's commitment to the environment:</p> <p style="text-align: center;">Global Citizenship Report</p>	

Technical Specifications

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www8.hp.com/us/en/hp-information/environment/ecolabels.html>

ISO 14001 certificates:

[http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/
PC_GBU_Product_Design_ISO_14K_Certificate.pdf](http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/PC_GBU_Product_Design_ISO_14K_Certificate.pdf)

and

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf>

QuickSpecs

HP ProBook 430 G3 Notebook PC, HP ProBook
440 G3 Notebook PC, HP ProBook 450 G3
Notebook PC, , HP ProBook 470 G3 Notebook PC

Options and Accessories (sold separately and availability may vary by country)

Type	Description	Part #	
Cases	HP Essential Top Load Case	H2W17AA	
	HP Essential Backpack (up to 15.6")	H1D24AA	
	HP Essential Messenger Case (up to 17.3")	H1D25AA	
	HP Business Backpack (up to 17.3")	H5M90AA	
	HP Business Case(up to 15.6")	H5M92AA	
Docking	HP 3001pr USB 3 Port Replicator	F3S42AA	
	HP 3005pr USB 3.0 Port Replicator	H1L08AA	
	HP Adjustable Display Stand	AW663AA	
Input/Output - Mice	HP Stylish USB Keyboard and Mouse	H4B80AA	
	HP Stylish Wireless Keyboard and Mouse	H4B79AA	
	HP 2.4 GHz Keyboard and Mouse	G1K29AA	
	HP Ultra Mobile Wireless Mouse	H6F25AA	
	HP Comfort Grip Wireless Mouse	H2L63AA	
	HP 3-Button USB Laser Mouse	H4B81AA	
	HP USB Travel Mouse	G1K28AA	
	HP Ultrathin Wireless Mouse	L9V78AA	
	HP Conferencing Keyboard	K8P74AA	
	HP Speaker Phone	K7V16AA	
	HP Wired Headset	K7V17AA	
	HP HDMI to DVI Adapter	F5A28AA	
	HP Wireless Display Adapter	J1V25AA	
	Power	HP 45W Smart AC Adapter 4.5mm	H6Y88AA
		HP 65W Smart AC Adapter	H6Y89AA
HP 65W Slim AC Adapter		H6Y82AA	
HP Power Bank		N9F71AA	
Storage	HP External USB Optical Drive	F2B56AA	
	HP 500GB 7200rpm HDD	F3B97AA	
	HP External Portable USB3.0 HDD	K6A93AA	
Security	HP UltraSlim Keyed Cable Lock	H4D73AA	
	HP USB Smart Card Reader	F6V67AA	
	HP 14.0" NB Privacy Filter	J6E65AA	
Displays	HP ProDisplay P242va 24-inch Monitor	K7X32AA	
	HP EliteDisplay E222 21.5-inch Monitor	M1N96AA	
	HP EliteDisplay E240 23.8-inch Monitor	M1N99AA	
	HP EliteDisplay E240c 23.8-inch Monitor	M1P00AA	
	HP EliteDisplay S270c 27-inch Curved Display	K1M38AA	



Summary of Changes

Date of change:	Version History:		Description of change:
	Version 1 to 2		

©Copyright 2015 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties are contained in the limited warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For DTS patents, see <http://patents.dts.com>. Manufactured under license from DTS Licensing Limited. DTS, the Symbol, & DTS and the Symbol together are registered trademarks, and DTS Studio Sound is a trademark of DTS, Inc. © DTS, Inc. All Rights Reserved.

Bluetooth is a trademark of its proprietor used by Hewlett-Packard Company under license.

ENERGY STAR is a registered trademark of the U.S. Environmental Protection Agency. Intel and Core are trademarks of Intel Corporation in the U.S. and other countries. Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.